



PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #: MTR-204FDJH

| HP | kW | Voltage | Frequency | EFF. | P.F. | Frame | Design | F.L. RPM |
|----|------|-----------------|-----------|-------|-------|-------|--------|----------|
| 2 | 1,49 | 115 / 208 - 230 | 60Hz | 84,7% | 0,961 | 56JH | B | 1750 |

| FLA | | | Service Factor | N.L. Amps @ 115V | N.L. Amps @ 230V | KVA Code | L.R. Amps @ 15v | L.R. Amps @ 230v |
|-------|------|------|----------------|------------------|------------------|----------|-----------------|------------------|
| 115 | 208 | 230 | | 1,15 | 3,90 | | 1,95 | H |
| 16,17 | 8,94 | 8,08 | | | | | | |

| Start Cap. | Run Cap. | Main Winding Ω 115V @ 25°C | Main Winding Ω 230V @ 25°C | Auxillary Winding Ω @ 25°C | Safe Cold Start (Secs) |
|--------------------|-------------------|-----------------------------------|-----------------------------------|-----------------------------------|------------------------|
| 400 μ f/300vac | 80 μ f/450vac | 0,3100 | 1,200 | 1,130 | 12 |


| Wgt. Lbs | PH | Duty | Insul. Class | Amb. | Elevation | Temp. Rise° C |
|----------|----|-------|--------------|------|------------------|---------------|
| 50 | 1 | Cont. | F | 40°C | 1000M (3,300 Ft) | 76 |

| % Efficiency | | Power Factor | | Torque | | Protection |
|--------------|-------|--------------|------|------------------|-----|------------|
| Full Load: | 84,7% | Full Load: | 0,96 | Full Load Ft/Lbs | 6,0 | |
| 3/4 Load: | 73,4% | 3/4 Load: | 0,93 | Locked Rotor % | 268 | |
| 1/2 Load: | 54,3% | 1/2 Load: | 0,91 | Break Down % | 229 | |

| Rotor Inertia Wk2 Lb-Ft2 | Max Load Inertia Wk2 Lb-Ft2 | Shaft Material | Frame Material | DE Bracket Type | ODE Bracket Type | Enclosure | NEMA Rating | Lead Wire Size |
|--------------------------|-----------------------------|----------------|----------------|-----------------|------------------|-----------|-------------|----------------|
| / | / | 304SS | Rolled Steel | Aluminium Alloy | | TEFC | IP55 | / |

| Ball Bearings | | Grease | Mount Type | Orientation | Paint | Sound Pressure @ 3FT | Sound Power |
|---------------|------|-----------------|------------|-------------|-------|----------------------|-------------|
| DE | ODE | | | | | | |
| 6205 | 6203 | Sealed Bearings | Rigid | Horizontal | Black | 68 | / |

WIRING CONNECTION DIAGRAM : B

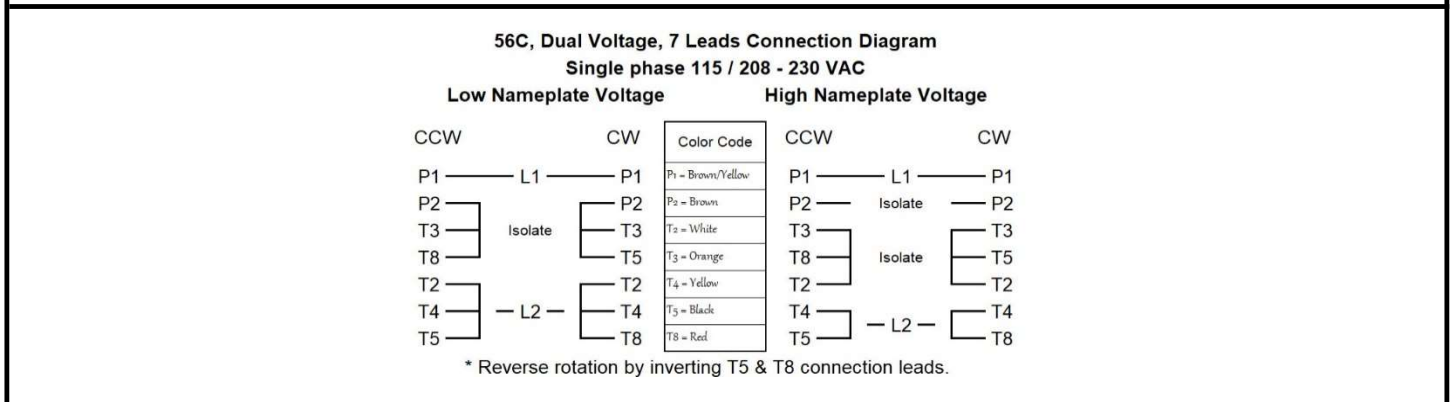



Date: 2023-12-22
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée



Catalogue #: **MTR-204FDJH**



Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

| HP | VAC | RPM | Enclosure | Frame | Frequency | Design | Poles | LR Code Letter | Insulation Class | Temp. Rise °C |
|----|-----|------|-----------|-------|-----------|--------|-------|----------------|------------------|---------------|
| 2 | 230 | 1750 | TEFC | 56JH | 60 | B | 4 | H | F | 76 |

| | 0% | 25% | 50% | 75% | 100% | 125% | 150% |
|-------------|------|--------|-------|--------|-------|--------|-------|
| Load % | 0% | 25% | 50% | 75% | 100% | 125% | 150% |
| Amps | 5,74 | 6,14 | 6,55 | 7,11 | 8,08 | 10,10 | 12,12 |
| Torq ft/lbs | 0 | 1,47 | 2,96 | 4,47 | 6,00 | 7,56 | 9,13 |
| RPM | 0 | 1787,5 | 1775 | 1762,5 | 1750 | 1737,5 | 1725 |
| Eff | 0 | 29,34 | 54,33 | 73,40 | 84,70 | 85,25 | 87,94 |
| PF | 0,00 | 90,00 | 91,10 | 93,22 | 96,10 | 94,18 | 91,30 |

| | Locked Rotor | Pull-Up | Breakdown | Rated Load | Idle | Duty | S. F. | Ambient | Elevation | dBa @ 1M |
|-----------------|--------------|---------|-----------|------------|--------|--------------------------------------|-------|---------|-----------|----------|
| Speed (RPM) | 0 | 900 | 1440 | 1750 | 1800 | Continuous | 1,15 | 40°C | 3,300 ft | 68 |
| Current (Amps) | 54 | 45,9 | 32,1 | 8,08 | 5,7368 | VFD Rating: Meets MG1 parts 31.4.4.2 | | | | |
| Torque (ft-lbs) | 16,09 | 13,67 | 13,75 | 6,00 | 0,0 | C.T. | 1,2 | V.T. | 1,13 | |

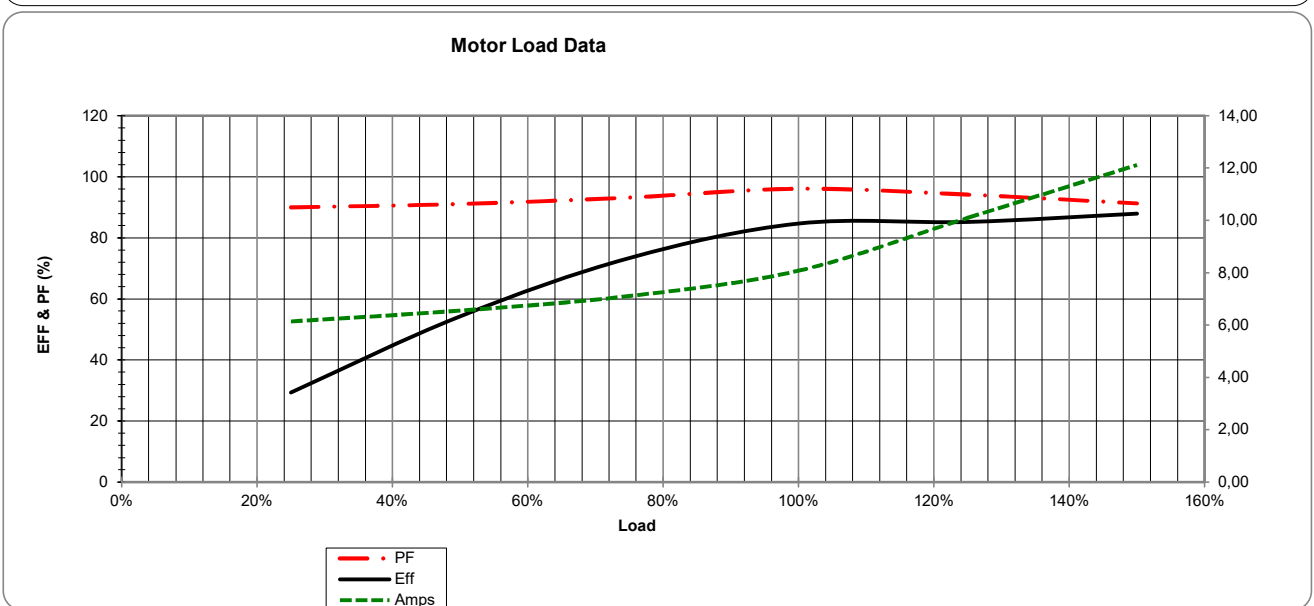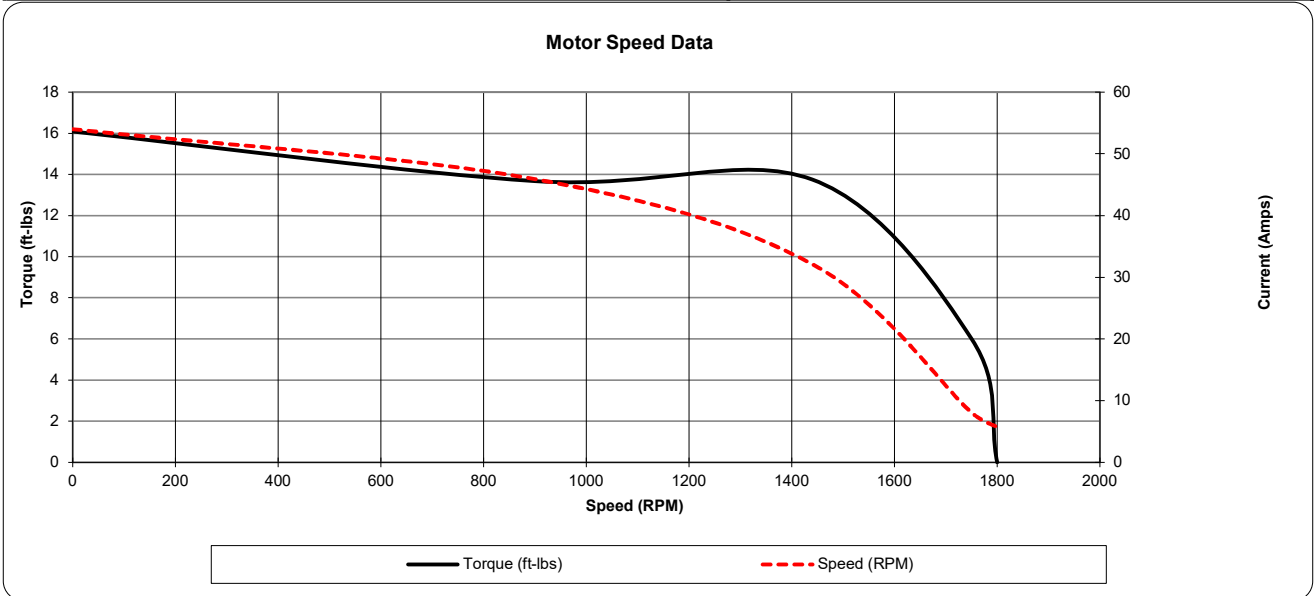

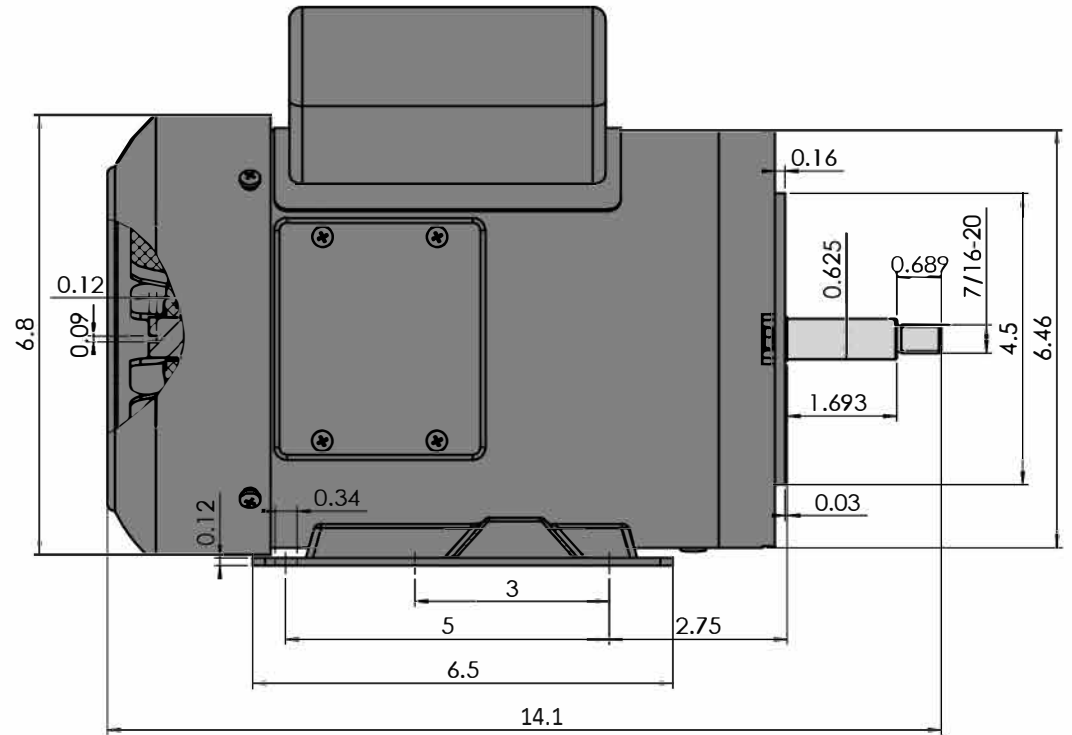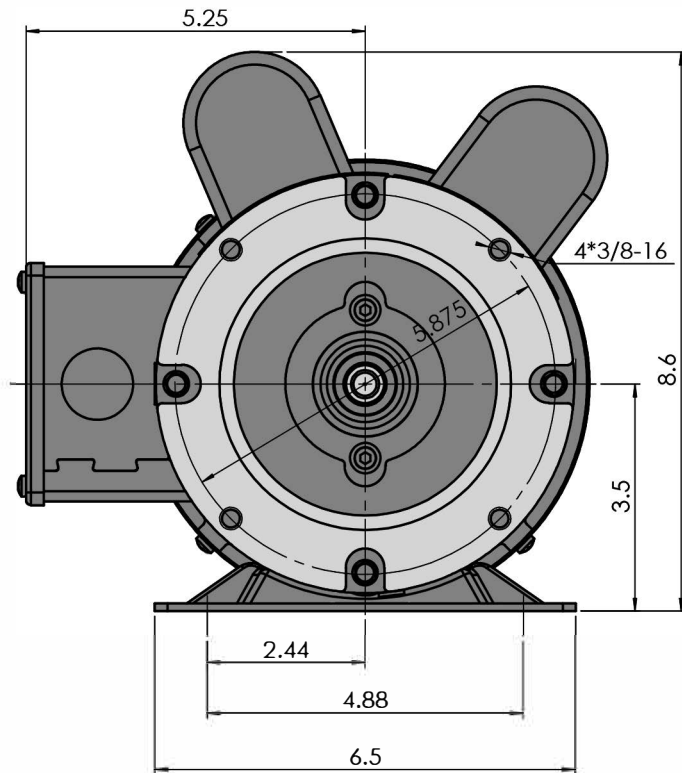

MTR-204FDJH

| | | | | | |
|---|------------------------|----|------|-------|-----------|
| Version:1HUA | Revised: November 2022 | HP | RPM | FRAME | ENCLOSURE |
| Customer is responsible in determining that MaxMotion product will fit/perform suitably in the intended application | | 2 | 1800 | 56J | TEFC |

SINGLE PHASE CENTRIFUGAL JET PUMP AC MOTORS

HEAVY GAUGE ROLLED STEEL CONSTRUCTION
TEFC TOTALLY ENCLOSED FAN COOLED

MaxMotion

Applications:

A versatile design with removable base for footless mounting, for use on jet pumps, Robust motor design to meet demanding high starting torque applications in severe environmental conditions.

Features:

Design - L, suitable for ambient temperature of 40°C, altitude 1000M

Agency Listings and Standard - NEMA, CSAus and CSA Certified, RoHS Compliant

Service Factor - 1.15

Electrical Supply - 115/230VAC, 60Hz

Mounting - Universal mounting by feet or C flange, vertical shaft up or down.

Frame - NEMA 56C with threaded shaft for fixed CW rotation

Shaft - Made of 304 stainless steel with both DE & ODE oil seals

Windings - VPI with additional dip and bake, with numbered and color coded wire leads.

Insulation - Class F insulation with B temperature rise.

Protection - Automatic thermal overload.

Voltage and Frequency Variation - $\pm 10\%$

Bearings - Permanently Lubricated High quality Double Shielded Ball Bearings with oversized DE bearings. Lithium based grease operating temperature range – 25° trough 175°C.

Earthing Terminals - Grounding screw in conduit box

Enclosure Protection - IP55

Frame Construction - Rolled Steel with cast aluminum end shields

Conduit Box - Rotatable 180°, with ½ NPT knockouts positioned for wiring access every 90° with rubber gasket between box and motor frame.

Nameplate - Stainless Steel with etched details.

Drain Hole - Positioned in the stator frame at the lowest point, when motors a horizontally mounted.

Fan Cover - Plastic fan & heavy duty plastic fan guard

Warranty - 1 year



SINGLE PHASE CENTRIFUGAL JET PUMP AC MOTORS

HEAVY GAUGE ROLLED STEEL CONSTRUCTION

TEFC TOTALLY ENCLOSED FAN COOLED



| HP | FL RPM | VOLTS | FRAME | CAT NO. | CONSTRUCTION | NOM EFF. | F.L. AMPS | CODE | WT (Lbs) | DE BRG | ODE BRG | LRT | "C" Dimension (Inch) |
|------|--------|---------|-------|-------------|--------------|----------|------------|------|----------|--------|---------|--------|----------------------|
| 0.33 | 3520 | 115/230 | 56J | MTR-132FDJH | Rolled Steel | 67,3 | 3.83/1.92 | L | 22 | 6205 | 6203 | 300% + | 11.1 |
| | 1770 | 115/230 | 56J | MTR-134FDJH | Rolled Steel | 68,8 | 3.92/1.96 | M | 26 | 6205 | 6203 | 300% + | 11.1 |
| 0.50 | 3520 | 115/230 | 56J | MTR-122FDJH | Rolled Steel | 71,3 | 5.03/2.52 | L | 25 | 6205 | 6203 | 300% + | 11.1 |
| | 1765 | 115/230 | 56J | MTR-124FDJH | Rolled Steel | 74,6 | 5.7/2.85 | M | 27 | 6205 | 6203 | 300% + | 11.1 |
| 0.75 | 3520 | 115/230 | 56J | MTR-342FDJH | Rolled Steel | 77,5 | 6.82/3.41 | L | 26 | 6203 | 6203 | 300% + | 11.1 |
| | 1760 | 115/230 | 56J | MTR-344FDJH | Rolled Steel | 77 | 7.33/3.66 | L | 31 | 6205 | 6203 | 300% + | 11.9 |
| 1 | 3520 | 115/230 | 56J | MTR-102FDJH | Rolled Steel | 77,9 | 8.61/4.31 | J | 30 | 6205 | 6203 | 300% + | 11.9 |
| | 1760 | 115/230 | 56J | MTR-104FDJH | Rolled Steel | 79,8 | 9.09/4.54 | K | 38 | 6205 | 6203 | 300% + | 12.9 |
| 1.5 | 3520 | 115/230 | 56J | MTR-152FDJH | Rolled Steel | 82,3 | 12.47/6.23 | J | 36 | 6205 | 6203 | 283% | 12.9 |
| | 1750 | 115/230 | 56J | MTR-154FDJH | Rolled Steel | 81,8 | 12.41/6.2 | J | 44 | 6205 | 6203 | 294% | 12.9 |
| 2 | 3510 | 115/230 | 56J | MTR-202FDJH | Rolled Steel | 83 | 15.92/7.96 | H | 42 | 6205 | 6203 | 273% | 12.9 |
| | 1750 | 115/230 | 56J | MTR-204FDJH | Rolled Steel | 84,7 | 16.17/8.08 | H | 50 | 6205 | 6203 | 269% | 14.1 |