



IEC PERFORMANCE DATA SHEET
IEC Efficiency Level IE1

Catalog #: IJA801-4-24

HP	kW	Voltage	L.R. Amps	Efficiency	Power Factor	Service Factor	Frame	Design
0,75	0,56	230 / 460	7,56	74,0%	0,75	1,15	80	N

60 Hz								
FLA							Is/In	F.L. RPM
208	230	333	460	575	796	990		
/	2,49	/	1,24	/	/	/	6,1	1665

50 Hz								
FLA						Efficiency	Is/In	F.L. RPM
190	380	400	415	660	725			
3,18	1,59	1,51	1,46	/	/	70,0%	6,1	1390

Wgt. Lbs	PH	Duty	Insul. Class	Ambient Temp.	Elevation	Temp. Rise° C
17,6	3	S1	H	40°C	1000 M	39

% Efficiency		% Power Factor		Torque			Protector Type	Winding Resist. Ω
Full Load:	74,0%	Full Load:	0,75	FLT ft.lbs	60Hz	50Hz		
3/4 Load:	71,0%	3/4 Load:	0,63	LRT %	240	240	-	-
1/2 Load:	64,5%	1/2 Load:	0,49	BDT %	230	230	-	-


Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Mounting	Enclosure	Protection
-	-	Standard	Aluminum	Standard	Standard	B3	TEFC	IP55

Ball Bearings		Grease	Mount Type	Orientation	Cold Start (Secs)	Paint
DE	ODE					
6204ZZ-C3	6204ZZ-C3	Sealed Bearings	Rigid	Horizontal	15	Red

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range
	10:1	20:1

WIRING CONNECTION DIAGRAM : B

IEC Frames 56 - 100L, Dual Voltage
208 - 230 / 460 VAC, 6 posts, 9 leads, YY / Y Connection


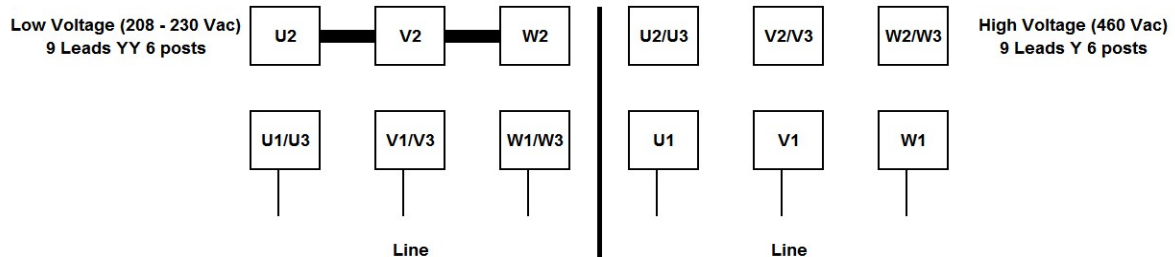




Date: **25 janvier, 2024**
 Customer: _____
 Contact: _____
 Submittee: **J.C. Lavallée**

Catalogue #: **IJA801-4-24**

IEC Efficiency Level IE1											
HP	Kw	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Is/In	Insulation Class	Temp. Rise °C
0,75	0,56	230 / 460	1665	TEFC	80	60	N	4	6,1	H	39
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz	
Amps	1,24	1,24	1,24	1,24	1,24	1,24	1,24	1,24	1,24	1,24	1,24
RPM	0	167	416	833	1249	1665	2081	2498	2914	3330	
Torq ft.lb	1,89	2,37	2,37	2,37	2,37	2,37	1,89	1,58	1,35	1,18	
Peak Tq ft.lb	2,54	5,09	5,09	5,09	5,09	5,09	4,07	3,39	2,91	1,24	
HP	0,00	0,08	0,19	0,38	0,56	0,75	0,75	0,75	0,75	0,75	
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M	
Speed (RPM)	0	810	1350	1665	1800	S1	1,15	40°C	3,300 ft	-	
Current (Amps)	7,56	6,05	4,24	1,24	1,00	VFD Rating: Meets MG1 parts 31.4.4.2					
Torque (ft.lbs)	5,68	4,83	5,44	2,37	0,0	CT :	10:1	VT :	20:1		

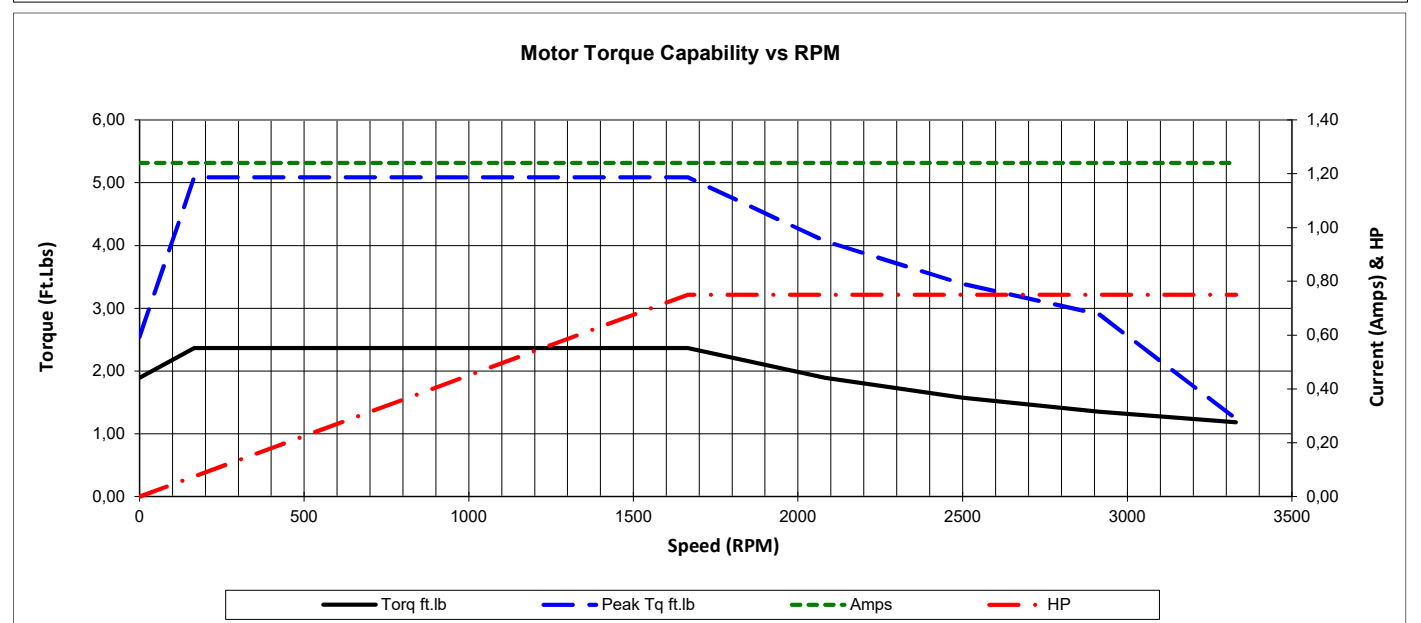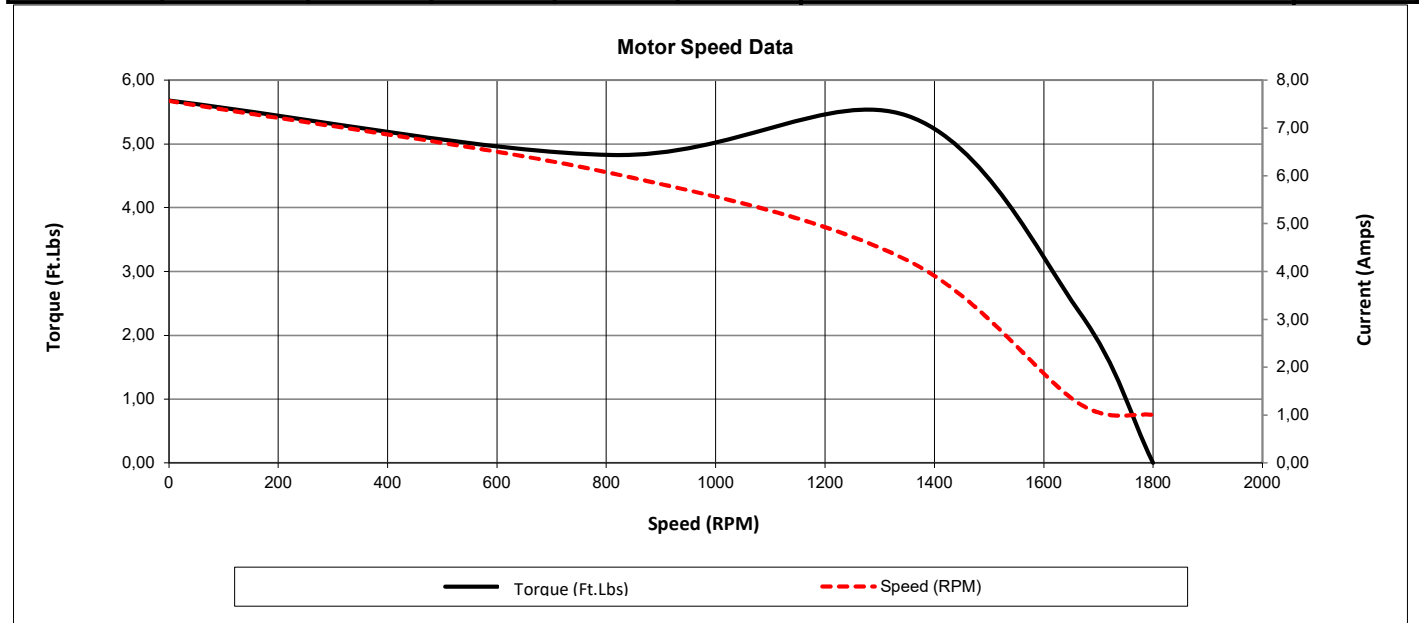

Date: **25 janvier, 2024**
 Customer: _____
 Contact: _____
 Submittee: **J.C. Lavallée**

Catalogue #: **IJA801-4-24**

IEC Efficiency Level IE1											
HP	Kw	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Is/In	Insulation Class	Temp. Rise °C
0,75	0,56	230 / 460	1665	TEFC	80	60	N	4	6,1	H	39

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	1,00	1,00	1,10	1,14	1,24	1,43	1,81
Torq ft/lbs	0	0,56	1,14	1,74	2,37	3,08	3,96
RPM	0	1766	1733	1699	1665	1597	1492
Eff %	0	48,2	64,5	71,0	74,0	72,1	66,2
PF %	0	34,3	48,6	63,4	75,0	77,3	78,8

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	810	1350	1665	1800	S1	1,15	40°C	3,300 ft	-
Current (Amps)	7,56	6,05	4,24	1,24	1,00	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	5,68	4,83	5,44	2,37	0,0	CT :	10:1	VT :	20:1	

