



IEC PERFORMANCE DATA SHEET
IEC Efficiency Level IE3

Catalog #: IJA803-2-24-IE3

HP	kW	Voltage	L.R. Amps	Efficiency	Power Factor	Service Factor	Frame	Design
2,00	1,49	230 / 460	19,91	85,5%	0,84	1,15	80	N

60 Hz								
FLA							Is/In	F.L. RPM
208	230	333	460	575	796	990		
/	5,24	/	2,62	/	/	/	7,6	3470

50 Hz								
FLA						Efficiency	Is/In	F.L. RPM
190	380	400	415	660	725			
6,34	3,17	3,01	2,90	/	/	84,2%	7,6	2895

Wgt. Lbs	PH	Duty	Insul. Class	Ambient Temp.	Elevation	Temp. Rise° C
26,4	3	S1	H	40°C	1000 M	35

% Efficiency		% Power Factor		Torque			Protector Type	Winding Resist. Ω
Full Load:	85,5%	Full Load:	0,84	FLT ft.lbs	60Hz	50Hz		
3/4 Load:	82,1%	3/4 Load:	0,80	LRT %	230	230	-	-
1/2 Load:	74,5%	1/2 Load:	0,71	BDT %	230	230	-	-


Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Mounting	Enclosure	Protection
-	-	Standard	Aluminum	Standard	Standard	B3	TEFC	IP55

Ball Bearings		Grease	Mount Type	Orientation	Cold Start (Secs)	Paint
DE	ODE					
6204ZZ-C3	6204ZZ-C3	Sealed Bearings	Rigid	Horizontal	15	Red

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range
	10:1	20:1

WIRING CONNECTION DIAGRAM : B

IEC Frames 56 - 100L, Dual Voltage
208 - 230 / 460 VAC, 6 posts, 9 leads, YY / Y Connection

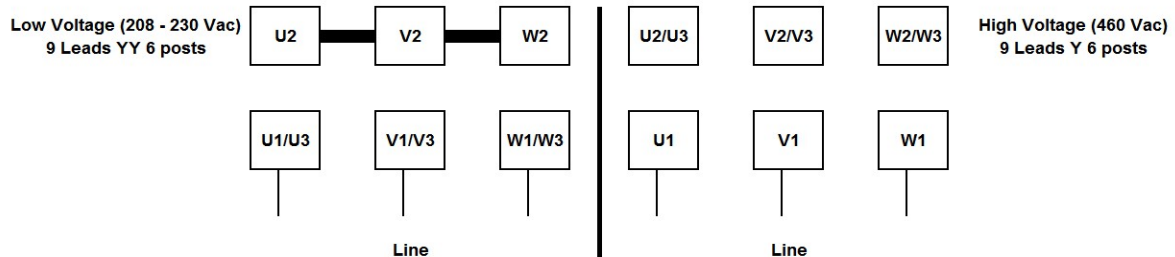


Date: **25 janvier, 2024**
 Customer: _____
 Contact: _____
 Submittee: **J.C. Lavallée**


Catalogue #: **IJA803-2-24-IE3**

IEC Efficiency Level IE3											
HP	Kw	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Is/In	Insulation Class	Temp. Rise °C
2,00	1,49	230 / 460	3470	TEFC	80	60	N	2	7,6	H	35
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz	
Amps	2,62	2,62	2,62	2,62	2,62	2,62	2,62	2,62	2,62	2,62	2,62
RPM	0	347	868	1735	2603	3470	4338	5205	6073	6940	
Torq ft.lb	2,42	3,03	3,03	3,03	3,03	3,03	2,42	2,02	1,73	1,51	
Peak Tq ft.lb	3,25	6,51	6,51	6,51	6,51	6,51	5,21	4,34	3,72	2,62	
HP	0,00	0,20	0,50	1,00	1,50	2,00	2,00	2,00	2,00	2,00	
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M	
Speed (RPM)	0	1620	2700	3470	3600	S1	1,15	40°C	3,300 ft	-	
Current (Amps)	19,91	15,93	11,15	2,62	2,12	VFD Rating: Meets MG1 parts 31.4.4.2					
Torque (ft-lbs)	6,96	5,92	6,96	3,03	0,0	CT :	10:1	VT :	20:1		

Motor Speed Data

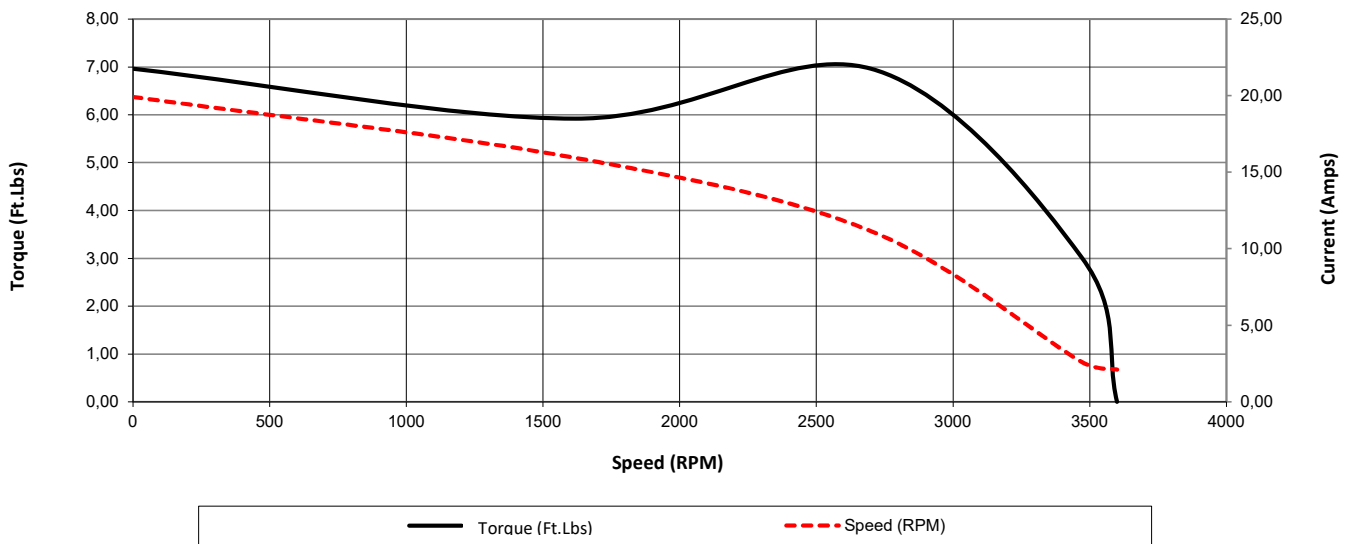

Motor Torque Capability vs RPM

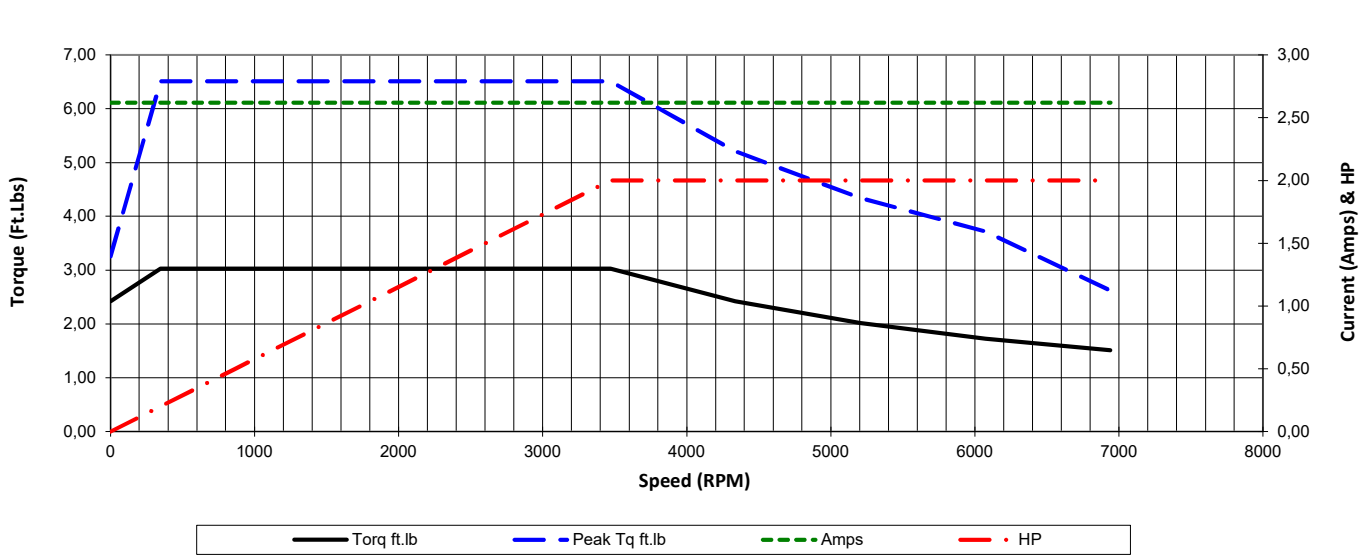

Date: **25 janvier, 2024**
 Customer: _____
 Contact: _____
 Submittee: **J.C. Lavallée**

Catalogue #: **IJA803-2-24-IE3**

IEC Efficiency Level IE3											
HP	Kw	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Is/In	Insulation Class	Temp. Rise °C
2,00	1,49	230 / 460	3470	TEFC	80	60	N	2	7,6	H	35

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	2,12	2,12	2,32	2,42	2,62	3,02	3,83
Torq ft/lbs	0	0,74	1,49	2,25	3,03	3,95	5,07
RPM	0	3568	3535	3503	3470	3328	3109
Eff %	0	55,7	74,5	82,1	85,5	83,3	76,5
PF %	0	38,4	71,3	80,0	84,0	86,5	88,2

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1620	2700	3470	3600	S1	1,15	40°C	3,300 ft	-
Current (Amps)	19,91	15,93	11,15	2,62	2,12	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	6,96	5,92	6,96	3,03	0,0	CT :	10:1	VT :	20:1	

