

## PERFORMANCE DATA SHEET NEMA PREMIUM NR CAN NEMA 12 - 12

Catalogue #: **JMPP-8**

| HP  | kW   | Voltage | S.F. @ 60Hz | EFF.  | P.F. | Frame | Design | L.R. Amps |
|-----|------|---------|-------------|-------|------|-------|--------|-----------|
| 1,5 | 1,12 | 575     | 1,25        | 87,5% | 0,68 | 182JM | B      | 16        |

| 60 Hz |     |     |     |     |     |     |  | Code | F.L. RPM |
|-------|-----|-----|-----|-----|-----|-----|--|------|----------|
| FLA   |     |     |     |     |     |     |  |      |          |
| 208   | 230 | 416 | 460 | 480 | 575 | 600 |  | M    | 1175     |
| /     | /   | /   | /   | /   | 1,9 | /   |  |      |          |

| 50 Hz |     |     |             |            |              |   |  | Code | F.L. RPM |
|-------|-----|-----|-------------|------------|--------------|---|--|------|----------|
| FLA   |     |     | S.F. @ 50Hz | Efficiency | Power Factor |   |  |      |          |
| 190   | 380 | 415 |             |            |              |   |  |      |          |
| /     | /   | /   | /           |            | /            | / |  | /    | /        |


| Wgt. Lbs | PH | Duty  | Insul. Class | Amb. | Elevation       | Temp. Rise° C |
|----------|----|-------|--------------|------|-----------------|---------------|
| 95       | 3  | Cont. | F            | 40°C | 1000M (3300 Ft) | < 80          |

| % Efficiency |       | % Power Factor |      | Torque           |     | Winding Resist. Ω | Safe Cold Start (Secs) |
|--------------|-------|----------------|------|------------------|-----|-------------------|------------------------|
| Full Load:   | 87,5% | Full Load:     | 0,68 | Full Load Ft/Lbs | 6,7 |                   |                        |
| 3/4 Load:    | 86,5% | 3/4 Load:      | 0,59 | Locked Rotor %   | 200 |                   |                        |
| 1/2 Load:    | 84,0% | 1/2 Load:      | 0,47 | Break Down %     | 290 | 0                 | 20                     |

| Rotor Inertia Wk2 Lb-Ft2 | Max Load Inertia Wk2 Lb-Ft2 | Shaft Material | Frame Material | DE Bracket Type | ODE Bracket Type | Enclosure | NEMA Rating | Lead Wire Size |
|--------------------------|-----------------------------|----------------|----------------|-----------------|------------------|-----------|-------------|----------------|
| 0,28                     | 33,8                        | Standard       | Cast Iron      | Standard        | Standard         | TEFC      | IP55        | 16AWG          |

| Ball Bearings |      | Grease          | Mount Type | Orientation | Paint | Sound Pressure @ 3FT | Sound Power |
|---------------|------|-----------------|------------|-------------|-------|----------------------|-------------|
| DE            | ODE  |                 |            |             |       |                      |             |
| 6306          | 6306 | Sealed Bearings | Rigid      | Horizontal  | Green | 57                   | 67          |

| Inverter Duty.<br>Motor meets MG1 parts 31.4.4.2 | Constant Torque Range | Variable Torque Range | Constant HP RPM |
|--|-----------------------|-----------------------|-----------------|
|  |                       | 10:1                  | 20:1            |

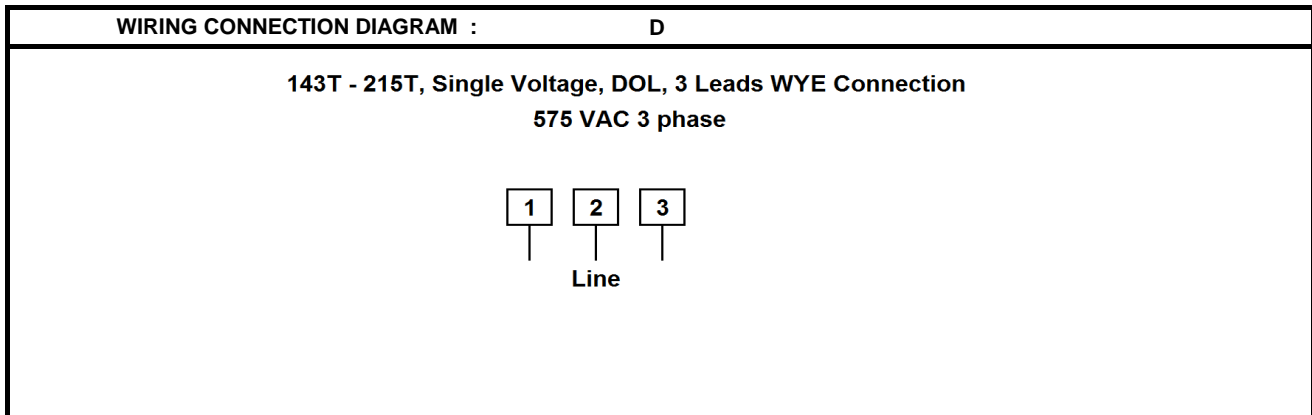


Date: 2020-04-02  
 Customer: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Submittee: J.C. Lavallée


Catalogue #: JMPP-8

| NEMA PREMIUM NR CAN NEMA 12 - 12 |              |         |           |            |           |                                      |         |                |                  |               |
|----------------------------------|--------------|---------|-----------|------------|-----------|--------------------------------------|---------|----------------|------------------|---------------|
| HP                               | VAC          | RPM     | Enclosure | Frame      | Frequency | Design                               | Poles   | LR Code Letter | Insulation Class | Temp. Rise °C |
| 1,5                              | 575          | 1175    | TEFC      | 182JM      | 60        | B                                    | 6       | M              | F                | < 80          |
|                                  | 0Hz          | 6Hz     | 15Hz      | 30Hz       | 45Hz      | 60Hz                                 | 75Hz    | 90Hz           | 105Hz            | 120Hz         |
| Amps                             | 1,9          | 1,9     | 1,9       | 1,9        | 1,9       | 1,9                                  | 1,9     | 1,9            | 1,9              | 1,9           |
| RPM                              | 0            | 117,5   | 293,75    | 587,5      | 881,25    | 1175                                 | 1468,75 | 1762,5         | 2056,25          | 2350          |
| Torq ft.lb                       | 5,36         | 6,70    | 6,70      | 6,70       | 6,70      | 6,70                                 | 5,36    | 4,47           | 3,83             | 3,35          |
| Peak Tq ft.lb                    | 8,21         | 16,43   | 16,43     | 16,43      | 16,43     | 16,43                                | 13,14   | 10,95          | 9,39             | 8,21          |
| HP                               | 0            | 0,2     | 0,4       | 0,8        | 1,1       | 1,5                                  | 1,5     | 1,5            | 1,5              | 1,5           |
|                                  | Locked Rotor | Pull-Up | Breakdown | Rated Load | Idle      | Duty                                 | S. F.   | Ambient        | Elevation        | dBA @ 1M      |
| Speed (RPM)                      | 0,0          | 504     | 960       | 1175       | 1200      | Continuous                           | 1,25    | 40°C           | 3300 ft          | 57            |
| Current (Amps)                   | 16,0         | 13,6    | 9,5       | 1,9        | 0,9       | VFD Rating: Meets MG1 parts 31.4.4.2 |         |                |                  |               |
| Torque (ft-lbs)                  | 13,4         | 10,1    | 19,4      | 6,7        | 0,0       | C.T.                                 | 10:1    | V.T.           | 20:1             |               |

Motor Speed Data

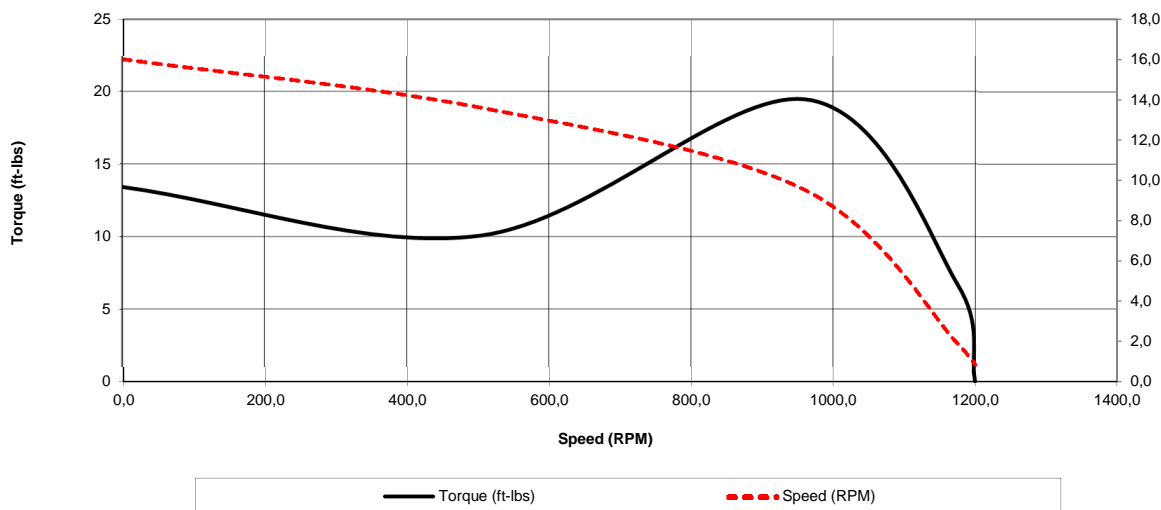

Motor Torque Capability vs RPM

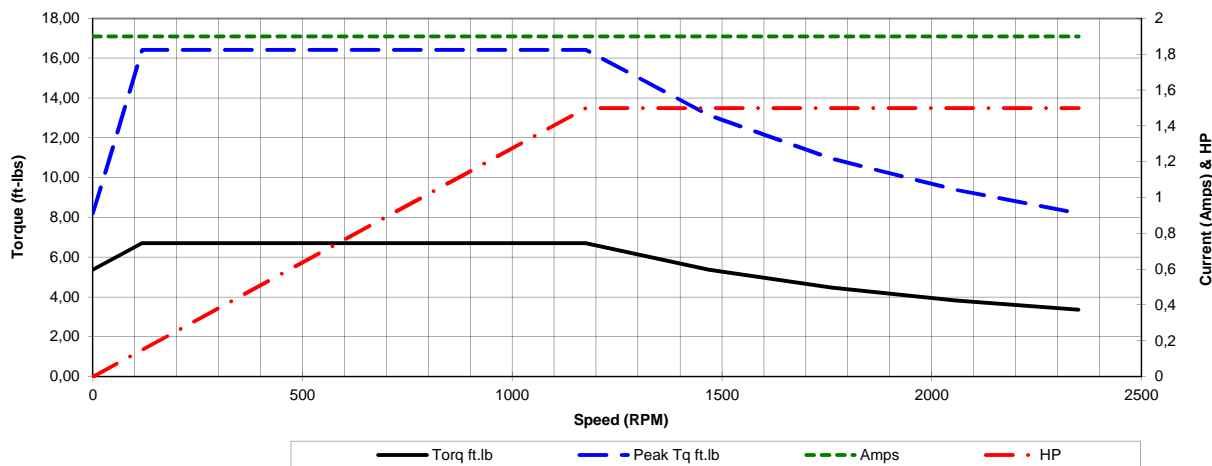



Date: 2020-04-02  
 Customer: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Submittee: J.C. Lavallée

Catalogue #: **JMPP-8**

| NEMA PREMIUM NR CAN NEMA 12 - 12 |                     |                |                  |                   |             |                                      |              |                |                  |                 |
|----------------------------------|---------------------|----------------|------------------|-------------------|-------------|--------------------------------------|--------------|----------------|------------------|-----------------|
| HP                               | VAC                 | RPM            | Enclosure        | Frame             | Frequency   | Design                               | Poles        | LR Code Letter | Insulation Class | Temp. Rise °C   |
| 1,5                              | 575                 | 1175           | TEFC             | 182JM             | 60          | B                                    | 6            | M              | F                | < 80            |
| <b>Load %</b>                    | <b>0%</b>           | <b>25%</b>     | <b>50%</b>       | <b>75%</b>        | <b>100%</b> | <b>125%</b>                          | <b>150%</b>  |                |                  |                 |
| <b>Amps</b>                      | 0,86                | 0,89           | 1,16             | 1,50              | 1,90        | 2,26                                 | 2,58         |                |                  |                 |
| <b>Torq ft/lbs</b>               | 0                   | 1,65           | 3,32             | 5,00              | 6,70        | 8,43                                 | 10,17        |                |                  |                 |
| <b>RPM</b>                       | 0                   | 1193,75        | 1187,5           | 1181,25           | 1175        | 1168,75                              | 1162,5       |                |                  |                 |
| <b>Eff</b>                       | 0                   | 79,03          | 84,00            | 86,50             | 87,50       | 87,50                                | 87,50        |                |                  |                 |
| <b>PF</b>                        | 0                   | 40             | 47               | 59                | 68          | 71                                   | 74,6         |                |                  |                 |
|                                  | <b>Locked Rotor</b> | <b>Pull-Up</b> | <b>Breakdown</b> | <b>Rated Load</b> | <b>Idle</b> | <b>Duty</b>                          | <b>S. F.</b> | <b>Ambient</b> | <b>Elevation</b> | <b>dBA @ 1M</b> |
| <b>Speed (RPM)</b>               | 0                   | 504            | 960              | 1175              | 1200        | Continuous                           | 1,25         | 40°C           | 3300 ft          | 57              |
| <b>Current (Amps)</b>            | 16                  | 13,6           | 9,5              | 1,9               | 0,855       | VFD Rating: Meets MG1 parts 31.4.4.2 |              |                |                  |                 |
| <b>Torque (ft-lbs)</b>           | 13,41               | 10,06          | 19,44            | 6,70              | 0,0         | C.T.                                 | 10:1         | V.T.           | 20:1             |                 |

