



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: **JMQPS-36**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
15	11,19	230/460	1,15	91,0%	0,834	254JM	B	116

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
/	37	/	18,5	/	/	/	G	3530

50 Hz								
FLA			S.F. @ 50Hz		Efficiency	Power Factor	Code	F.L. RPM
190	380	415						
45,0	22,5	/	1,00		89,0%	0,85	G	2930


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
363	3	Cont.	F	40°C	1000M (3300 Ft)	48

% Efficiency		% Power Factor		Torque			
Full Load:	91,0%	Full Load:	0,83	Full Load Ft/Lbs	22,3	Winding Resist. Ω	Safe Cold Start (Secs)
3/4 Load:	91,0%	3/4 Load:	0,81	Locked Rotor %	170		
1/2 Load:	89,5%	1/2 Load:	0,76	Break Down %	255	0,7	12

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
1,78	105	304SS	Stainless Steel			TEFC	IP69K	12AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6309	6309	Sealed Bearings	Foot	Horizontal	-	80	89

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	10:1	20:1	5400

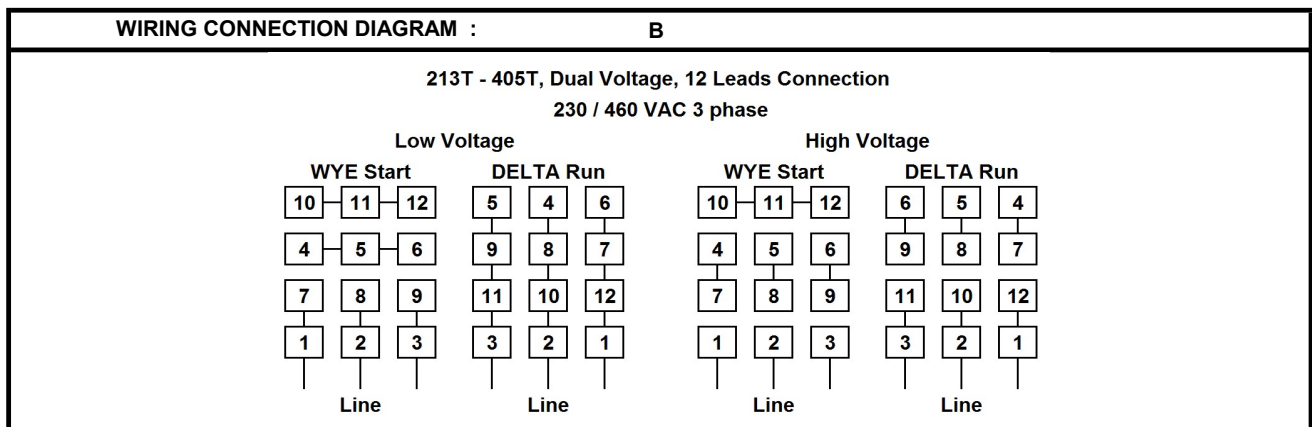


Date: 2025-05-22
 Customer:
 Contact:
 Submittee: J.C. Lavallée


Catalogue #: JMQPS-36

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
15	460	3530	TEFC	254JM	60	B	2	G	F	48
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	18,5	18,5	18,5	18,5	18,5	18,5	18,5	18,5	18,5	18,5
RPM	0	353	882,5	1765	2647,5	3530	4412,5	5295	6177,5	7060
Torq ft.lb	17,85	17,85	22,32	22,32	22,32	22,32	17,85	14,88	12,75	11,16
Peak Tq ft.lb	25,11	50,21	50,21	50,21	50,21	50,21	40,62	33,85	29,01	25,39
HP	0	1,2	3,8	7,5	11,3	15,0	15,0	15,0	15,0	15,0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	1512	2880	3530	3600	Continuous	1,15	40°C	3,300 ft	80
Current (Amps)	116,0	98,6	69,0	18,5	7,0	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	42,4	36,0	55,8	22,3	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

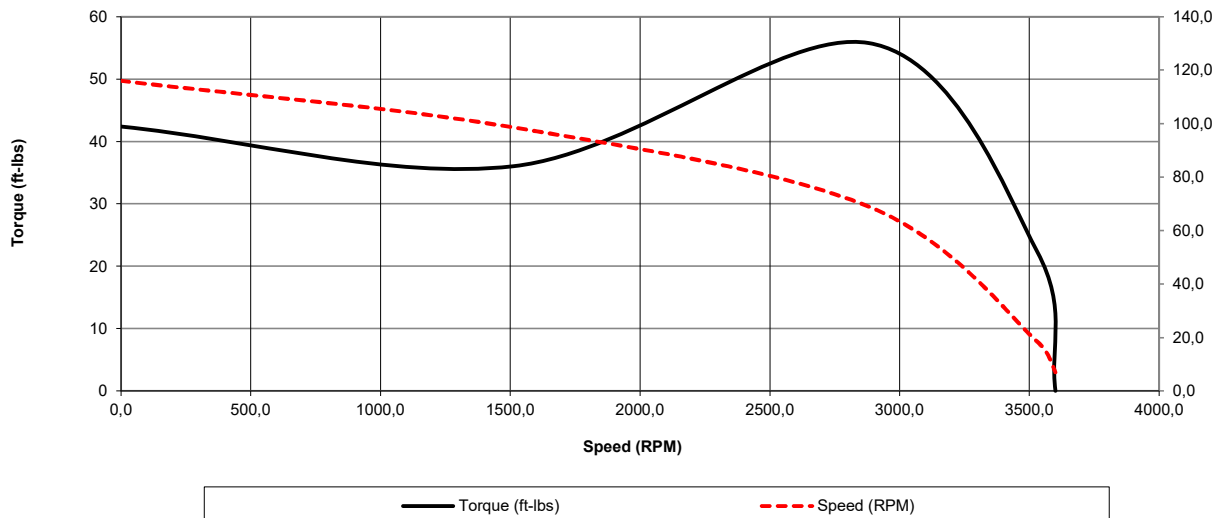

Motor Torque Capability vs RPM

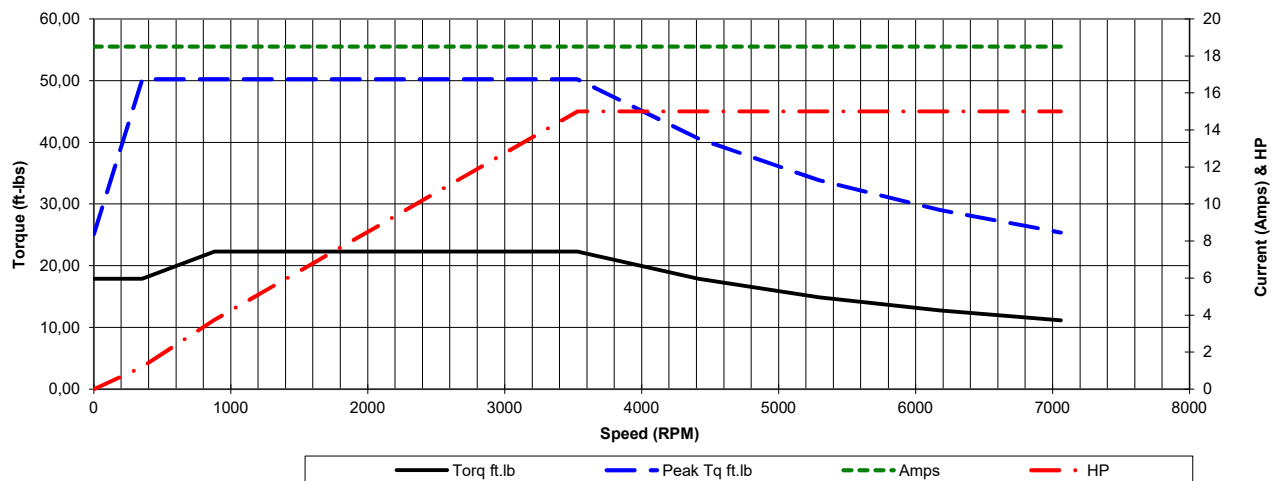

Date: 2025-05-22
 Customer:
 Contact:
 Submittee: J.C. Lavallée

Catalogue #: JMQPS-16S


NEMA PREMIUM NR CAN NEMA 12 - 12

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
3	460	3535	TEFC	145JM	60	B	2	K	F	32

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	1,54	1,73	2,40	3,16	4,05	4,96	5,93
Torq ft/lbs	0	1,10	2,21	3,33	4,46	5,60	6,75
RPM	0	3583,75	3567,5	3551,25	3535	3518,75	3502,5
Eff	0	70,73	84,20	87,10	86,50	86,50	86,50
PF	0	52,1	67,1	78,5	80,2	81,8	82,2

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1512	2880	3535	3600	Continuous	1,15	40°C	3,300 ft	78
Current (Amps)	32	27,2	19,0	4,05	1,539	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	8,91	7,58	14,71	4,46	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

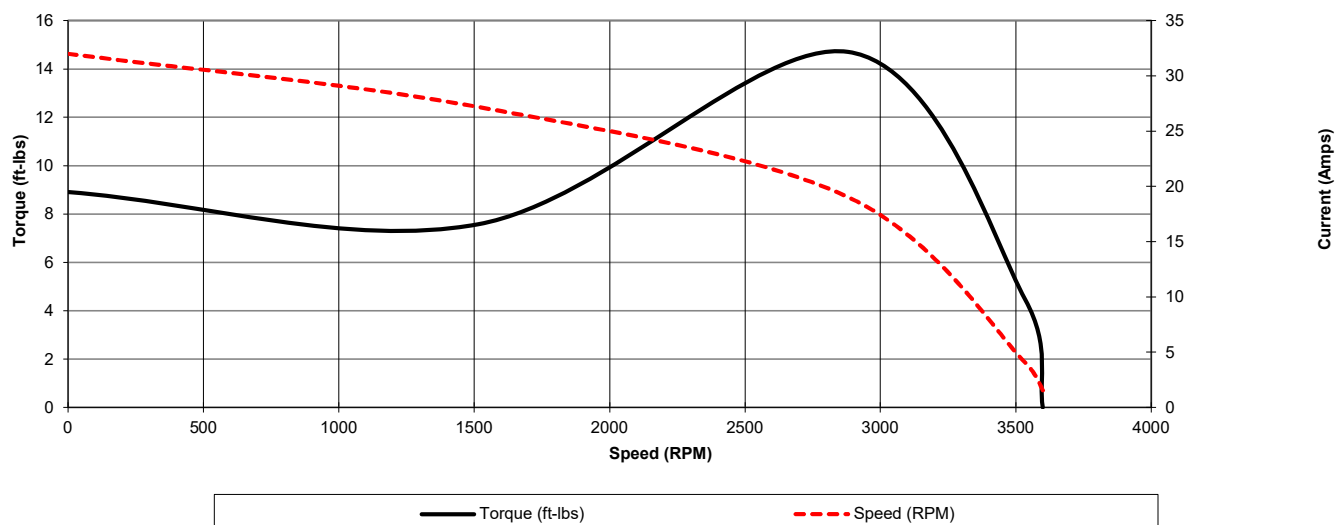

Motor Load Data

