



## PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #: **MQRP-202JH**

| HP | kW   | Voltage   | S.F. @ 60Hz | Efficiency | Power Factor | Frame | Design | L.R. Amps |
|----|------|-----------|-------------|------------|--------------|-------|--------|-----------|
| 2  | 1,49 | 230 / 460 | 1,15        | 85,5%      | 0,870        | 56J   | B      | 25        |

| 60 Hz |      |     |      |     |     |     |      |          |
|-------|------|-----|------|-----|-----|-----|------|----------|
| FLA   |      |     |      |     |     |     | Code | F.L. RPM |
| 208   | 230  | 416 | 460  | 480 | 575 | 600 |      |          |
| /     | 5,05 | /   | 2,53 | /   | /   | /   | L    | 3500     |

| 50 Hz |       |     |     |             |            |              |      |          |
|-------|-------|-----|-----|-------------|------------|--------------|------|----------|
| HP    | kW    | FLA |     | S.F. @ 50Hz | Efficiency | Power Factor | Code | F.L. RPM |
|       |       | 190 | 380 |             |            |              |      |          |
| 1,5   | 1,119 | 5,0 | 2,5 | 1,15        | 84,0%      | 0,81         | L    | 2870     |

| Wgt. Lbs | PH | Duty  | Insul. Class | Amb. | Elevation       | Temp. Rise° C |
|----------|----|-------|--------------|------|-----------------|---------------|
| 32       | 3  | Cont. | F            | 40°C | 1000M (3300 Ft) | 56            |

| % Efficiency |       | % Power Factor |      | Torque           |     | Winding Resist. Ω | Safe Cold Start (Secs) |
|--------------|-------|----------------|------|------------------|-----|-------------------|------------------------|
| Full Load:   | 85,5% | Full Load:     | 0,87 | Full Load Ft/Lbs | 3,0 |                   |                        |
| 3/4 Load:    | 86,2% | 3/4 Load:      | 0,82 | Locked Rotor %   | 388 |                   |                        |
| 1/2 Load:    | 84,0% | 1/2 Load:      | 0,74 | Break Down %     | 419 | 1,59 / 6,25       | 12                     |

| Rotor Inertia Wk2 Lb-Ft2 | Max Load Inertia Wk2 Lb-Ft2 | Shaft Material | Frame Material | DE Bracket Type | ODE Bracket Type | Enclosure | NEMA Rating | Lead Wire Size |
|--------------------------|-----------------------------|----------------|----------------|-----------------|------------------|-----------|-------------|----------------|
| /                        | /                           | 304SS          | Rolled Steel   | Aluminium Alloy |                  | TEFC      | IP55        | 14AWG          |

| Ball Bearings |      | Grease          | Mount Type | Orientation | Paint | Sound Pressure @ 3FT | Sound Power |
|---------------|------|-----------------|------------|-------------|-------|----------------------|-------------|
| DE            | ODE  |                 |            |             |       |                      |             |
| 6205          | 6203 | Sealed Bearings | Rigid      | Horizontal  | Black | 58                   | /           |

| Inverter Duty.<br>Motor meets MG1 parts 31.4.4.2 | Constant Torque Range | Variable Torque Range | Constant HP RPM |
|--------------------------------------------------|-----------------------|-----------------------|-----------------|
|                                                  | 10:1                  | 20:1                  | 5400            |




Date: 2024-05-01  
 Customer: \_\_\_\_\_  
 Contact: \_\_\_\_\_  
 Submittee: J.C. Lavallée

Catalogue #: MQRP-202JH


Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

| HP              | VAC          | RPM     | Enclosure | Frame      | Frequency | Design                               | Poles | LR Code Letter | Insulation Class | Temp. Rise °C |
|-----------------|--------------|---------|-----------|------------|-----------|--------------------------------------|-------|----------------|------------------|---------------|
| 2               | 460          | 3500    | TEFC      | 56J        | 60        | B                                    | 2     | L              | F                | 56            |
|                 | 0Hz          | 6Hz     | 15Hz      | 30Hz       | 45Hz      | 60Hz                                 | 75Hz  | 90Hz           | 105Hz            | 120Hz         |
| Amps            | 2,53         | 2,53    | 2,53      | 2,53       | 2,53      | 2,53                                 | 2,53  | 2,53           | 2,53             | 2,53          |
| RPM             | 0            | 350     | 875       | 1750       | 2625      | 3500                                 | 4375  | 5250           | 6125             | 7000          |
| Torq ft.lb      | 2,40         | 2,40    | 3,00      | 3,00       | 3,00      | 3,00                                 | 2,40  | 2,00           | 1,71             | 1,50          |
| Peak Tq ft.lb   | 4,64         | 9,29    | 9,29      | 9,29       | 9,29      | 9,29                                 | 7,43  | 6,19           | 5,31             | 4,64          |
| HP              | 0            | 0,2     | 0,5       | 1,0        | 1,5       | 2,0                                  | 2,0   | 2,0            | 2,0              | 2,0           |
|                 | Locked Rotor | Pull-Up | Breakdown | Rated Load | Idle      | Duty                                 | S. F. | Ambient        | Elevation        | dBA @ 1M      |
| Speed (RPM)     | 0,0          | 1512    | 2880      | 3500       | 3600      | Continuous                           | 1,15  | 40°C           | 3,300 ft         | 58            |
| Current (Amps)  | 25,0         | 21,3    | 14,9      | 2,5        | 1,0       | VFD Rating: Meets MG1 parts 31.4.4.2 |       |                |                  |               |
| Torque (ft-lbs) | 11,6         | 9,9     | 12,6      | 3,0        | 0,0       | C.T.                                 | 10:1  | V.T.           | 20:1             |               |

Motor Speed Data

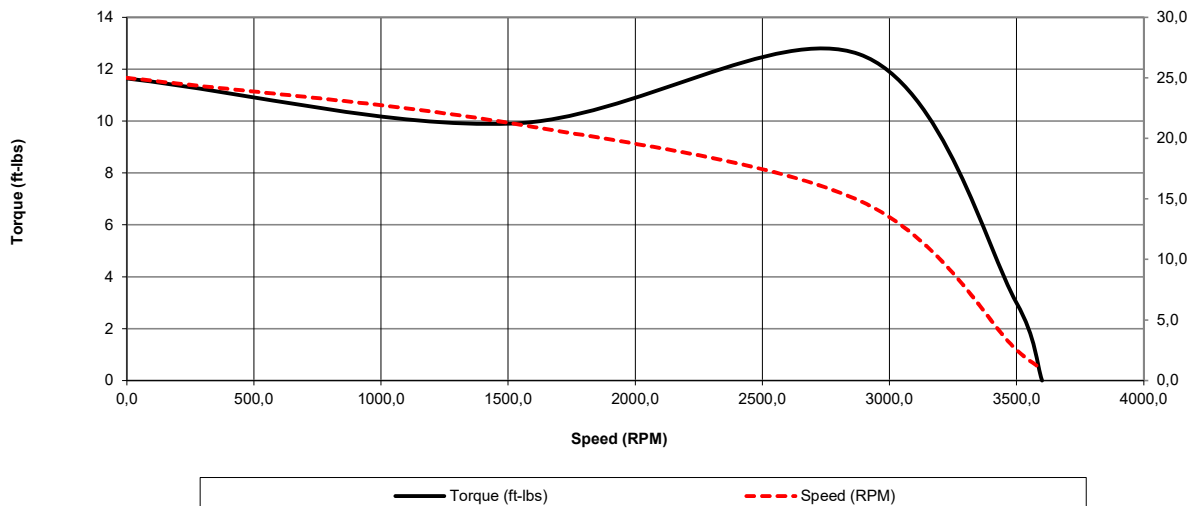

Motor Torque Capability vs RPM

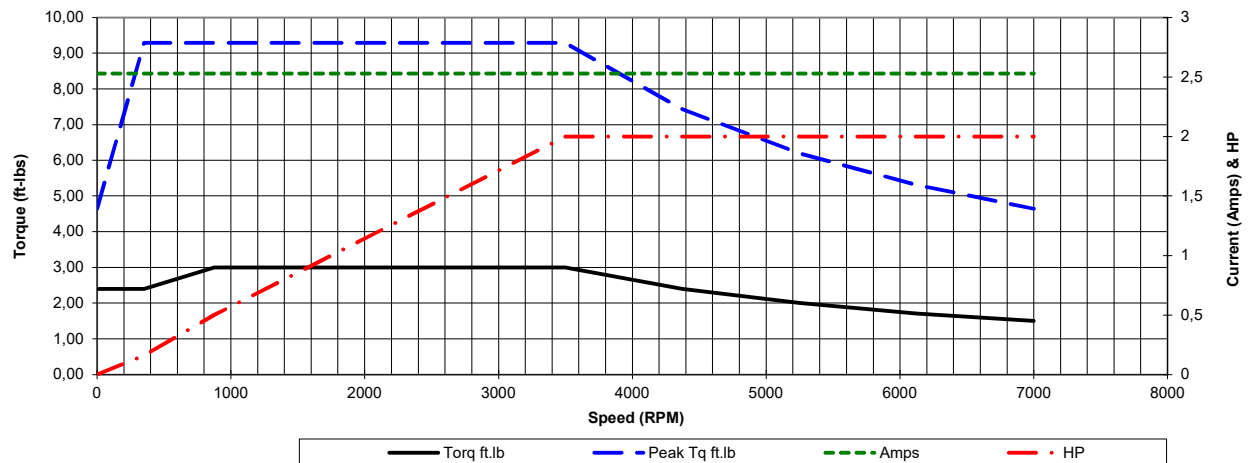




Date: 2024-05-01  
Customer:   
Contact:   
Submittee: J.C. Lavallée

Catalogue #: MQRP-202JH

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

| HP              | VAC          | RPM     | Enclosure | Frame      | Frequency | Design                               | Poles | LR Code Letter | Insulation Class | Temp. Rise °C |
|-----------------|--------------|---------|-----------|------------|-----------|--------------------------------------|-------|----------------|------------------|---------------|
| 2               | 460          | 3500    | TEFC      | 56J        | 60        | B                                    | 2     | L              | F                | 56            |
| Load %          | 0%           | 25%     | 50%       | 75%        | 100%      | 125%                                 | 150%  |                |                  |               |
| Amps            | 0,95         | 1,25    | 1,51      | 1,99       | 2,53      | 3,16                                 | 3,80  |                |                  |               |
| Torq ft/lbs     | 0            | 0,73    | 1,48      | 2,23       | 3,00      | 3,78                                 | 4,57  |                |                  |               |
| RPM             | 0            | 3575    | 3550      | 3525       | 3500      | 3475                                 | 3450  |                |                  |               |
| Eff             | 0            | 74,91   | 83,80     | 86,24      | 85,50     | 83,41                                | 81,03 |                |                  |               |
| PF              | 0            | 50,0    | 74        | 82         | 87,0      | 88,7                                 | 91,4  |                |                  |               |
| Speed (RPM)     | Locked Rotor | Pull-Up | Breakdown | Rated Load | Idle      | Duty                                 | S. F. | Ambient        | Elevation        | dBA @ 1M      |
| Speed (RPM)     | 0            | 1512    | 2880      | 3500       | 3600      | Continuous                           | 1,15  | 40°C           | 3,300 ft         | 58            |
| Current (Amps)  | 25           | 21,3    | 14,9      | 2,53       | 0,954     | VFD Rating: Meets MG1 parts 31.4.4.2 |       |                |                  |               |
| Torque (ft-lbs) | 11,64        | 9,90    | 12,57     | 3,00       | 0,0       | C.T.                                 | 10:1  | V.T.           | 20:1             |               |

Motor Speed Data

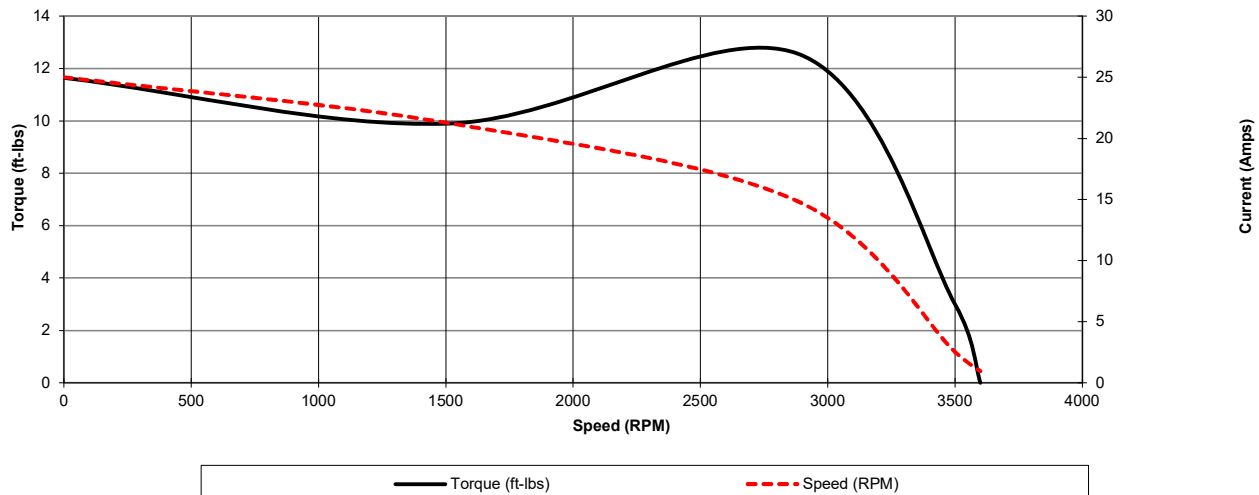

440T, 480T Dual Voltage DOL, 61 leads WYE Connection

Motor Load Data

