
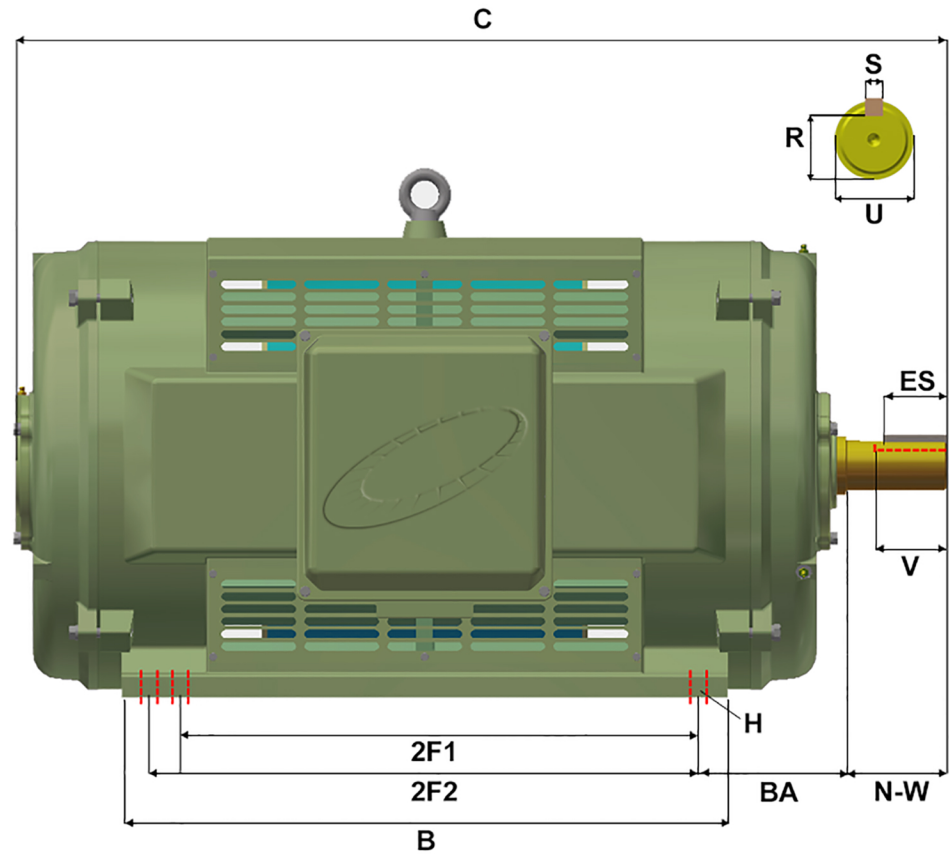


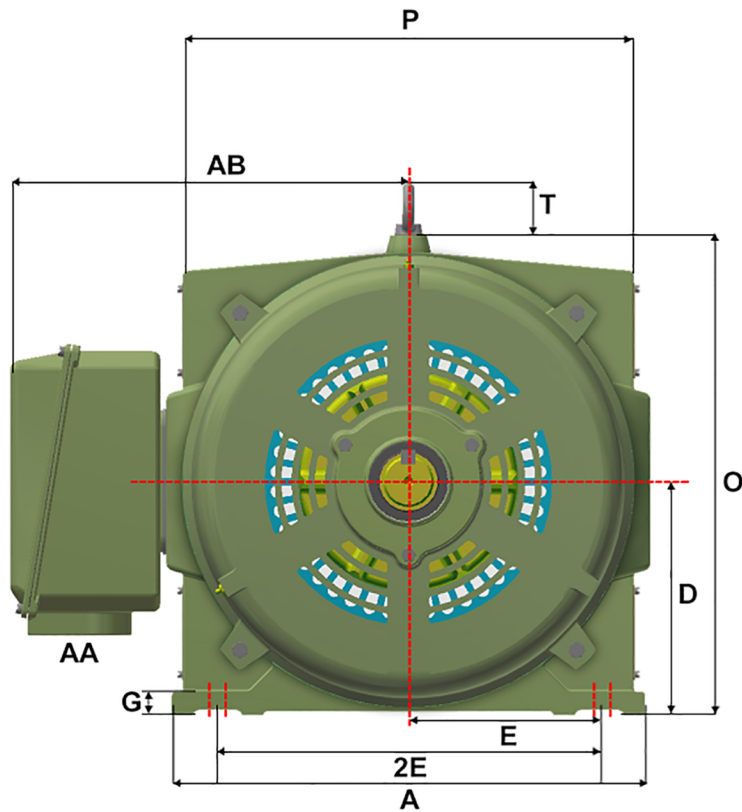

| Version: 2WTI                                                                                                        |       |       | Revised: 08-10-2019 |       |       | HP    | RPM   | FRAME | ENCLOSURE | MPOP/MQOP-96 |       |       |       |
|----------------------------------------------------------------------------------------------------------------------|-------|-------|---------------------|-------|-------|-------|-------|-------|-----------|--------------|-------|-------|-------|
| Customer is responsible in determining that Max Motion product will fit/perform suitably in the intended application |       |       |                     |       |       | 200   | 3600  | 444TS | ODP       |              |       |       |       |
| A                                                                                                                    | B     | C     | D                   | E     | 2E    | 2F1   | 2F2   | G     | H         | O            | P     | R     | S     |
| 22.30                                                                                                                | 20.80 | 34.75 | 11.00               | 9.00  | 18.00 | 14.50 | 16.50 | 1.15  | 6 X 0.81  | 22.60        | 23.30 | 2.021 | 0.625 |
| T                                                                                                                    | U     | V     | AA                  | AB    | BA    | ES    | N-W   |       |           |              |       |       |       |
| 3.00                                                                                                                 | 2.375 | 4.75  | 3.00                | 18.90 | 7.50  | 3.03  | 4.75  |       |           |              |       |       |       |