

**PERFORMANCE DATA SHEET
EPACT NR CAN NEMA 12 - 11**

Catalogue #: JMQ-11

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
2	1.49	230/460	1.15	84.0%	0.76	145JM	B	25

60 Hz								
FLA							Code	F.L. RPM
208	230	416	460	480	575	600		
6	5.4	3	2.7	2.6	/	/	L	3500

50 Hz								
FLA			S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM	
190	380	415						
7.0	3.5	3.2	1.00	82.0%	0.80	F	2865	

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
46	3	Cont.	F	40°C	1000M (3300 Ft)	42

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	84.0%	Full Load:	0.76	Full Load Ft/Lbs	3.0		
3/4 Load:	82.1%	3/4 Load:	0.68	Locked Rotor %	290	6	20
1/2 Load:	78.0%	1/2 Load:	0.54	Break Down %	330		

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
0.04	3.4	Standard	Cast Iron	Standard	Standard	TEFC	IP55	16AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6206	6205	Sealed Bearings	Rigid	Horizontal	Blue	76	85

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	2:1	10:1	5400

WIRING CONNECTION DIAGRAM : A

143T - 184T, Dual Voltage, DOL, 9 Leads WYE Connection
230 / 460 VAC




EPACT NR CAN NEMA 12 - 11										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
2	460	3500	TEFC	145JM	60	B	2	L	F	42


Load %	0%	25%	50%	75%	100%	125%	150%
Amps	1.60	1.98	2.24	2.50	2.70	3.53	4.13
Torq ft/lbs	0	0.74	1.49	2.23	3.02	3.81	4.57
RPM	0	3575	3550	3525	3500	3475	3450
Eff	0	67.56	78.00	82.10	84.00	84.00	84.00
PF	0	35	54	68	76	78.9	81

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBa @ 1M
Speed (RPM)	0	1512	2880	3500	3600	Continuous	1.15	40°C	3,300 ft	76
Current (Amps)	25	21.3	14.9	2.7	1.6	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	8.70	7.40	9.90	3.00	0.0	C.T.	2:1	V.T.	10:1	

Motor Speed Data

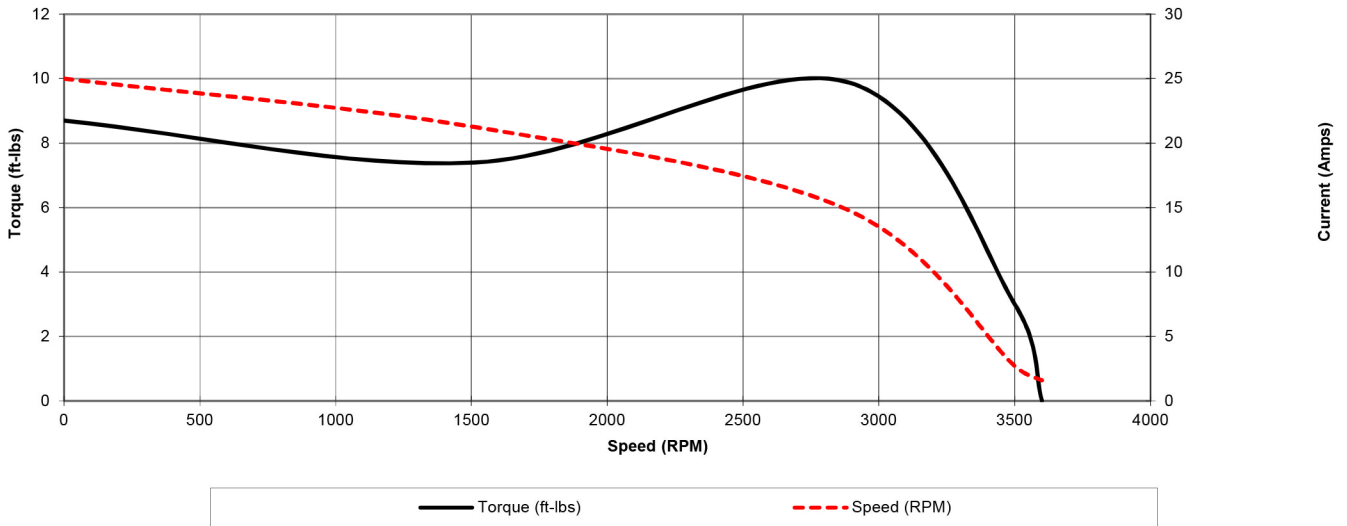


Motor Load Data

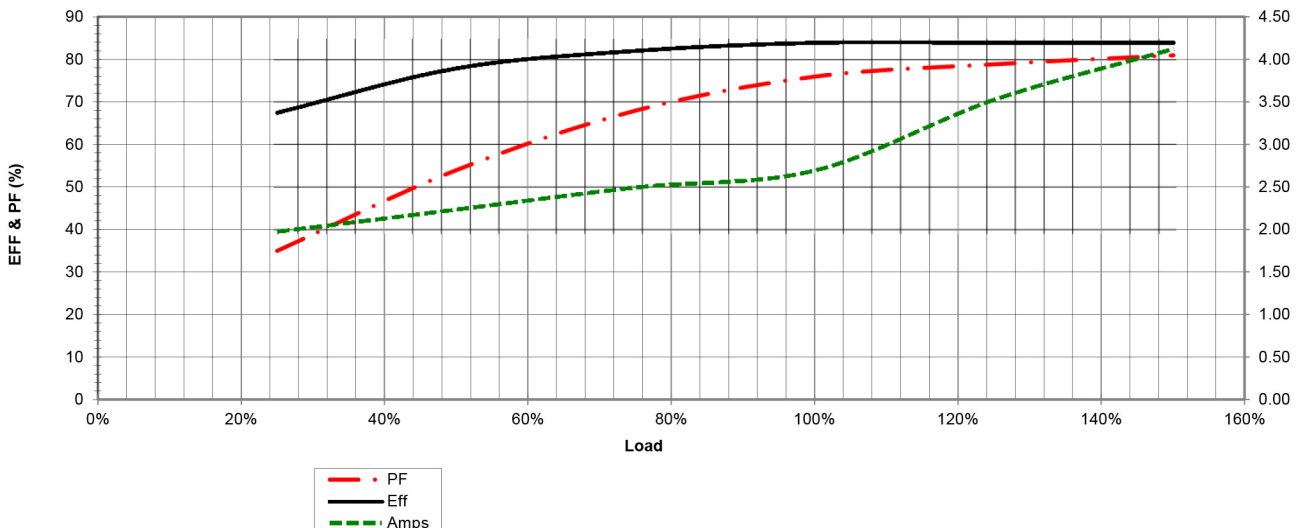

EPACT NR CAN NEMA 12 - 11

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
2	460	3500	TEFC	145JM	60	B	2	L	F	42
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
RPM	0	350	875	1750	2625	3500	4375	5250	6125	7000
Torq ft.lb	2.40	2.40	3.00	3.00	3.00	3.00	2.40	2.00	1.71	1.50
Peak Tq ft.lb	3.98	7.95	7.95	7.95	7.95	7.95	6.36	5.30	4.54	3.98
HP	0	0.2	0.5	1.0	1.5	2.0	2.0	2.0	2.0	2.0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0.0	1512	2880	3500	3600	Continuous	1.15	40°C	3,300 ft	76
Current (Amps)	25.0	21.3	14.9	2.7	1.6	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	8.7	7.4	9.9	3.0	0.0	C.T.	2:1	V.T.	10:1	

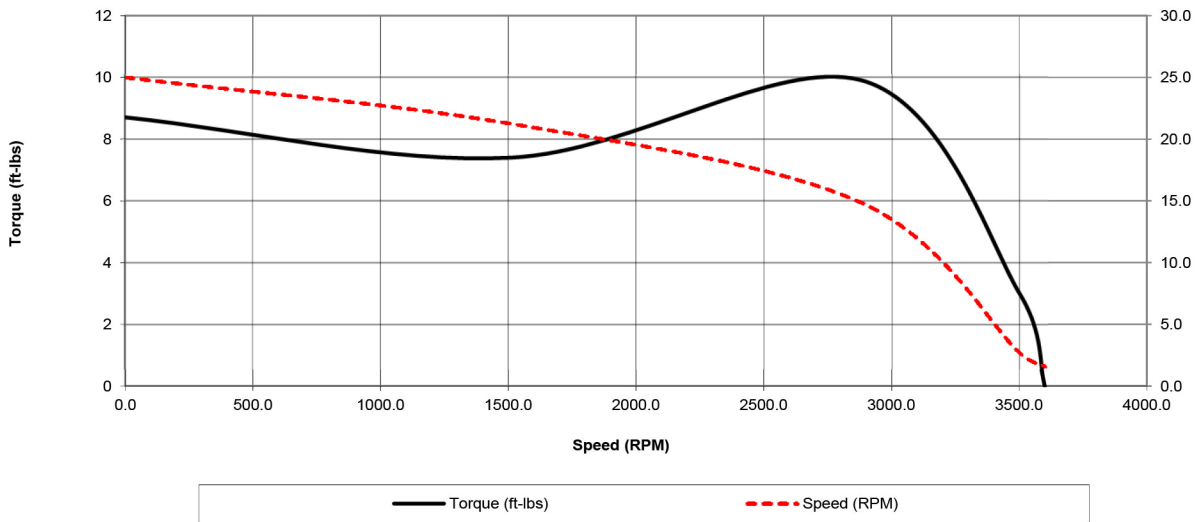Motor Speed Data

Motor Torque Capability vs RPM
