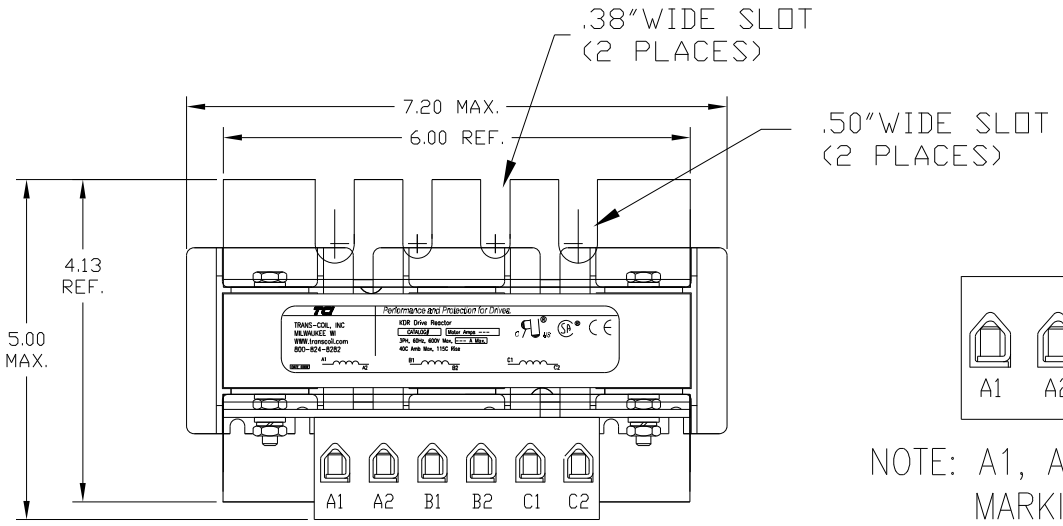

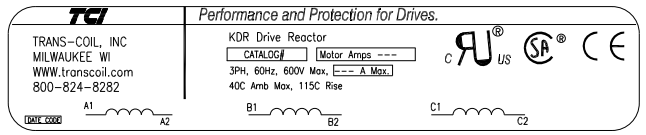

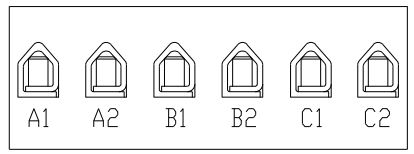

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRC22H	208/240	20	59.4	113	15	20

NOTE: NEC MOTOR CURRENT SHOWN ARE BASED ON HORSEPOWER AT 208 VOLTS.

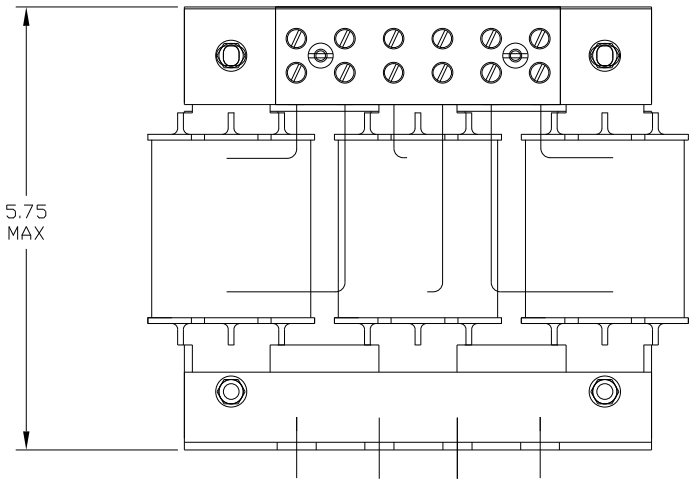

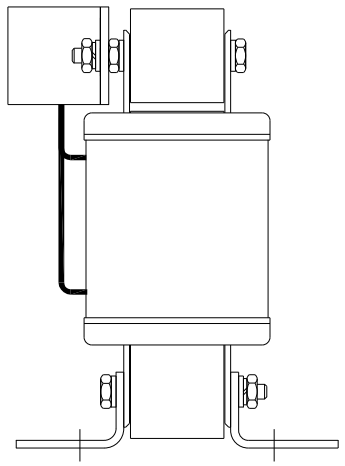

Block Wire Range:	#18 to #4 AWG Solid or Stranded, Copper
Tightening Torque:	20 LB-IN

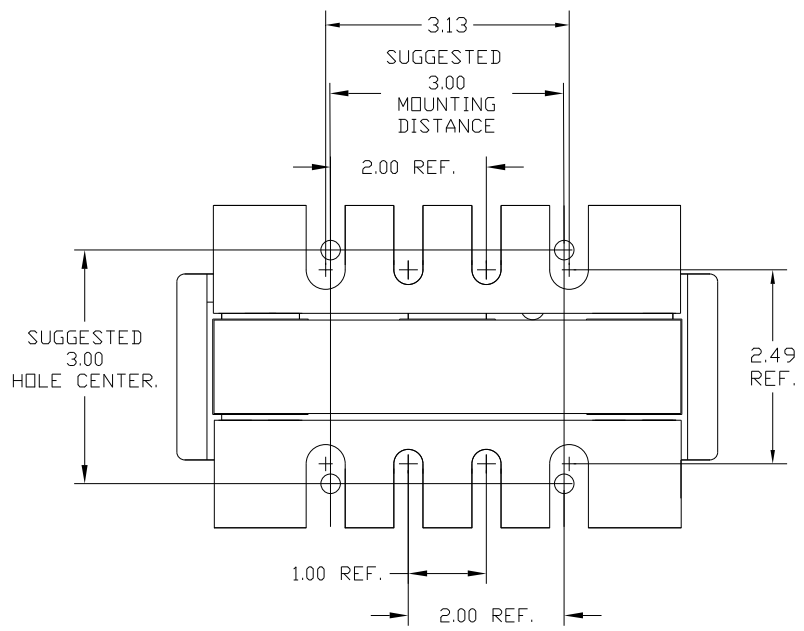

NO	REVISION	DATE	BY
C	ADD 3.13 DIM	12/20/11	DSW
B	ADD MARKING NOTE	11/15/06	DSW
A	2235 MOUNTING CHANGE	09/15/03	DSW

TOLERANCES (EXCEPT AS NOTED)
DECIMAL
.XX ±.03
.XXX±.01
FRACTIONAL
± 1/32
ANGULAR
± 1/2°

TCI
7878 N. 86th STREET
MILWAUKEE, WI 53224

KDR DRIVE REACTOR
240V HIGH Z, FRAME D

DRN. BY DSW | DATE 07/30/01 | DWG. NO. B KDRC22HDG
SCALE TO FIT | APRVD. | SHT. 1 OF1