


CATALOG NO	VOLTAGE	NEC MOTOR HP	NEC MOTOR CURRENT	WATTS LOSS	APPROX WT-LBS	TORQUE (LB-IN)
KDRD26L	208/240	20	59.4	94	12	20

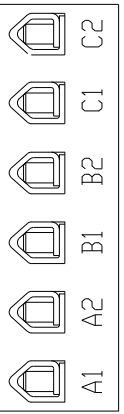

NOTE: A1, A2, B1, B2, C1, C2, MARKINGS ON TERMINAL BLOCK FOR REFERENCE ONLY.

TC
 TRANS-COIL, INC
 MILWAUKEE, WI
 WWW.transcoil.com
 800-824-8282



TC
 Performance and Protection for Drives.
 KDR Drive Reactor
 CATALOG Motor Amps ---
 3PH, 60Hz, 600V Max, ---A Max
 40C Amb Max, 115C Rise

UL[®] US[®] CE

A1 B1 C1

NOTE: NEC MOTOR CURRENT SHOWN ARE BASED ON HORSEPOWER AT 208 VOLTS.

Block Wire Range: #18 to #4 AWG Solid or Stranded, Copper
 Tightening Torque: 20 LB-IN

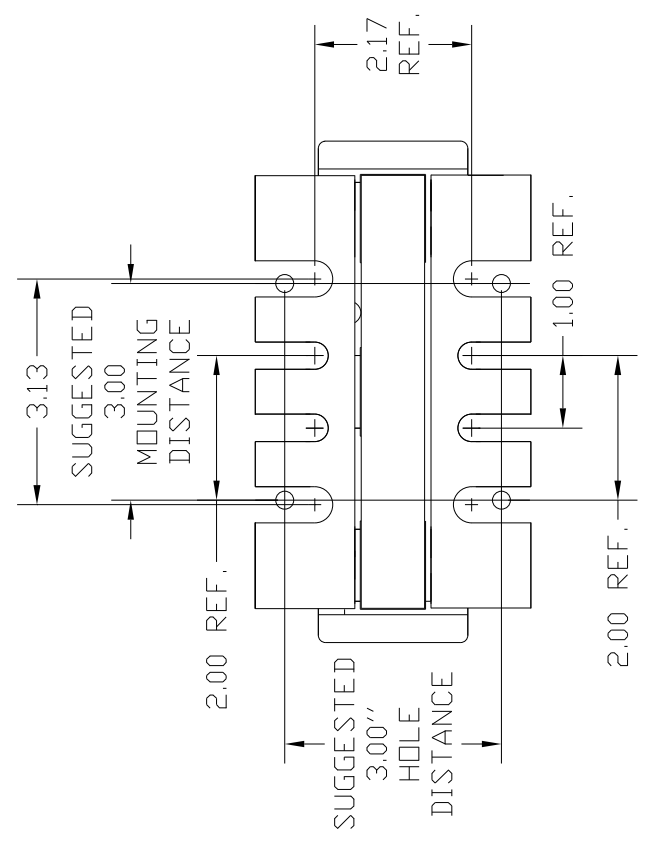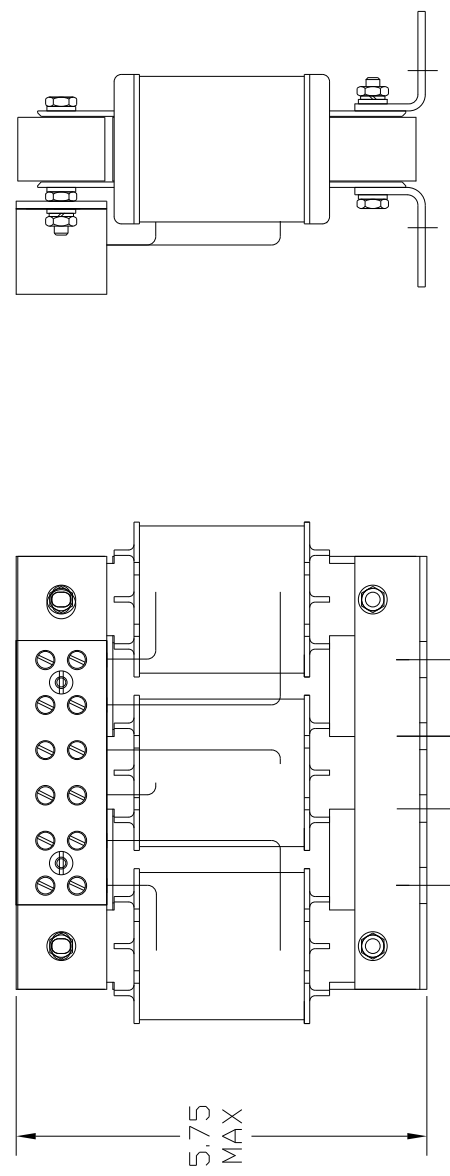

TOLERANCES (EXCEPT AS NOTED)	DATE	BY
DECIMAL		
.XX ±.03		
.XXX±.01		
FRACTIONAL ± 1/32	11/20/06	DSW
ANGULAR ± 1/2°	09/15/03	DSW
	REVISION	
	NO	

TC 7878 N. 86th STREET
 MILWAUKEE, WI 53224

KDR DRIVE REACTOR
 240V LOW Z, FRAME D

DRN. BY DSW DATE 02/21/03 DWG. NO. KDRD26LDG
 SCALE APPROV. B

SHT. 1 of 1