

PERFORMANCE DATA SHEET NEMA PREMIUM NR CAN NEMA 12 - 12

Catalogue #: **MPP-26S**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
7,5	5,60	575	1,25	89,5%	0,88	184T	B	50

60 Hz							
FLA						Code	F.L. RPM
208	230	416	460	480	575		
/	/	/	/	/	7,2	H	3500

50 Hz								
FLA			S.F. @ 50Hz		Efficiency	Power Factor	Code	F.L. RPM
190	380	415						
/	/	/						

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
117	3	Cont.	F	40°C	1000M (3300 Ft)	42

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	89,5%	Full Load:	0,88	Full Load Ft/Lbs	11,3		
3/4 Load:	89,0%	3/4 Load:	0,83	Locked Rotor %	190		
1/2 Load:	88,0%	1/2 Load:	0,73	Break Down %	300	2,3	20

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
0,26	12	Standard	Cast Iron	Standard	Standard	TEFC	IP55	14 AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6306	6306	Sealed Bearings	Rigid	Horizontal	Green	81	91

Inverter Duty. Motor meets MG1 parts 31.4.4.2	Constant Torque Range	Variable Torque Range	Constant HP RPM
	10:1	20:1	5400


WIRING CONNECTION DIAGRAM : D
143T - 215T, Single Voltage, DOL, 3 Leads WYE Connection 575 VAC 3 phase

Date: 2020-02-27
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée


Catalogue #: MPP-26S

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
7,5	575	3500	TEFC	184T	60	B	2	H	F	42
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	7,2	7,2	7,2	7,2	7,2	7,2	7,2	7,2	7,2	7,2
RPM	0	350	875	1750	2625	3500	4375	5250	6125	7000
Torq ft.lb	9,00	11,25	11,25	11,25	11,25	11,25	9,00	7,50	6,43	5,63
Peak Tq ft.lb	14,07	28,14	28,14	28,14	28,14	28,14	22,51	18,76	16,08	14,07
HP	0	0,8	1,9	3,8	5,6	7,5	7,5	7,5	7,5	7,5
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	1512	2880	3500	3600	Continuous	1,25	40°C	3300 ft	81
Current (Amps)	50,0	42,5	29,8	7,2	2,2	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	21,4	16,0	33,8	11,3	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

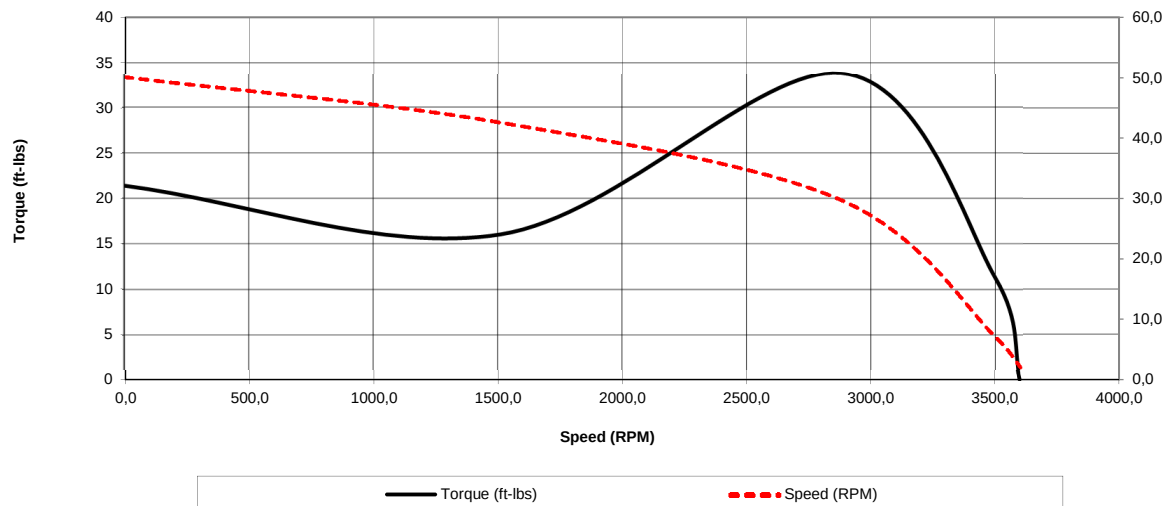

Motor Torque Capability vs RPM

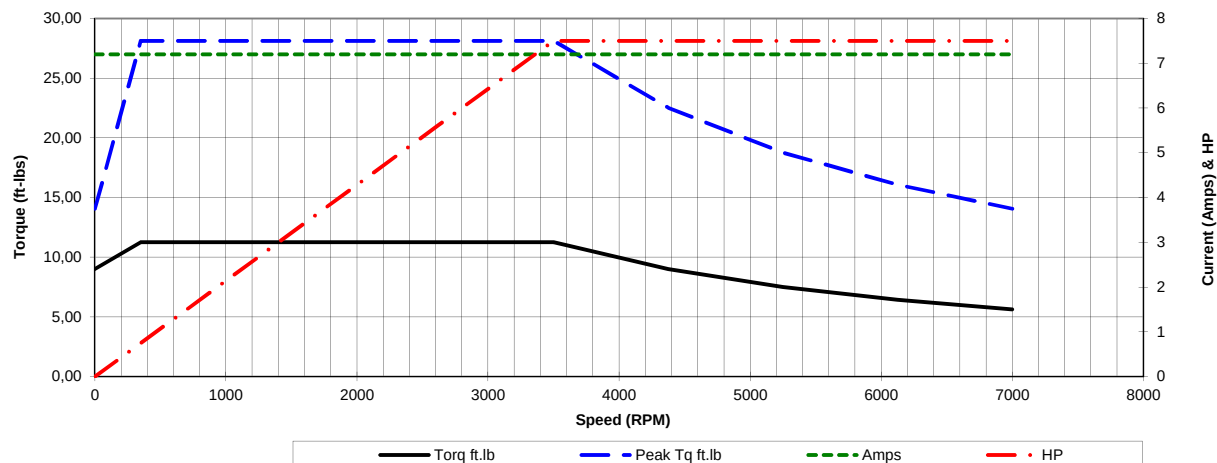


Date: 2020-02-27
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MPP-26S

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
7,5	575	3500	TEFC	184T	60	B	2	H	F	42
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	2,20	2,80	4,00	5,30	7,20	8,60	10,27			
Torq ft./lbs	0	2,71	5,43	8,19	10,99	13,79	16,67			
RPM	0	3575	3550	3525	3500	3475	3450			
Eff	0	78,75	88,00	89,00	89,50	89,50	89,50			
PF	0	63,7	73	83	88	91,2	91,7			
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	1512	2880	3500	3600	Continuous	1,25	40°C	3300 ft	81
Current (Amps)	50	42,5	29,8	7,2	2,2	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	21,38	16,04	33,76	11,25	0,0	C.T.	10:1	V.T.	20:1	

Motor Speed Data

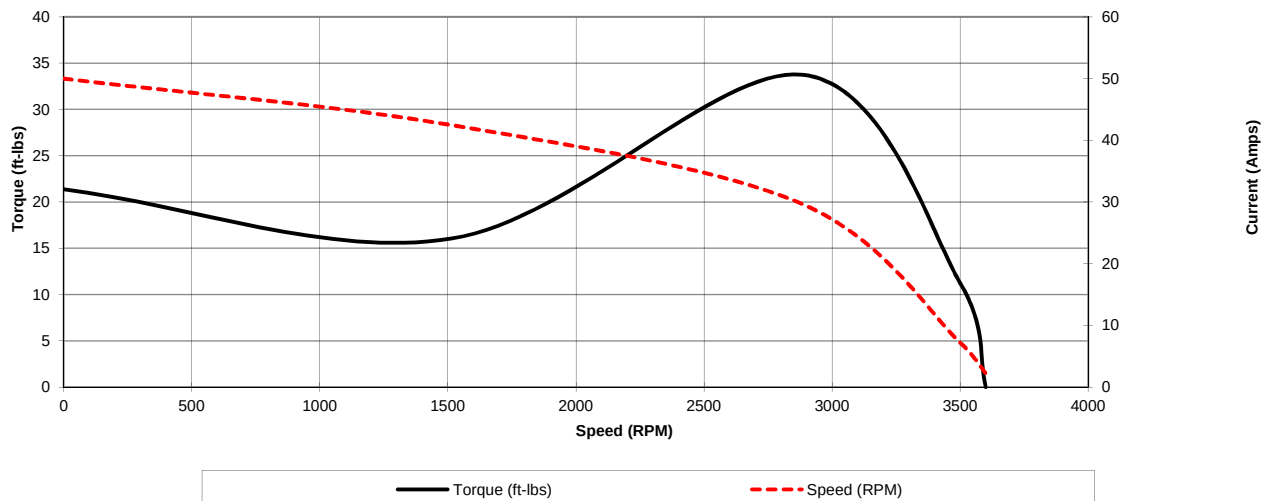

Motor Load Data

