



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: **MQOP-88**

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
150	111,90	460	1,15	95,4%	0,85	447T	B	1085

60 Hz							Code	F.L. RPM
208	230	416	460	480	575	600		
/	/	/	173,00	/	/		G	1190

50 Hz								
FLA			S.F. @ 50Hz		Efficiency	Power Factor	Code	F.L. RPM
190	380	415						
/	217		1,00		94,3%	0,830	E	985


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
1800	3	Cont.	F	40°C	1000M (3,300 Ft)	< 80

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	95,4%	Full Load:	0,85	Full Load Ft/Lbs	662,0		
3/4 Load:	95,0%	3/4 Load:	0,82	Locked Rotor %	150		
1/2 Load:	94,5%	1/2 Load:	0,74	Break Down %	250	0	20

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
109,16	2170	1045	Cast Iron	Cast Iron	Cast Iron	ODP	IP23	4AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
NU319	6318	Mobil PolyrexEm	Rigid	Horizontal	RAL6022	86	98

Inverter Duty, Motor meets MG1 parts 31.4.4.2	VFD SF	Constant Torque Range	Variable Torque Range	Constant HP RPM
	1,00	10:1	20:1	1800

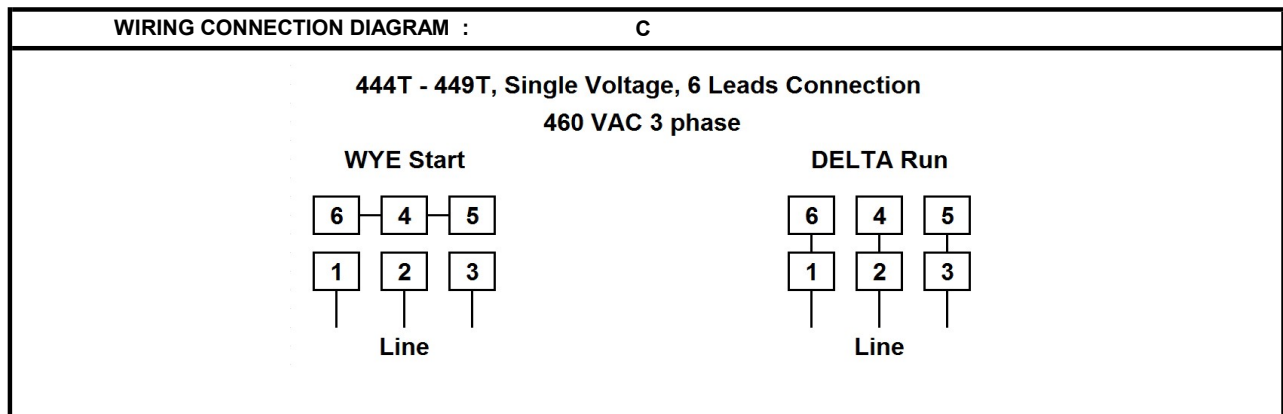


Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée


Catalogue #: **MQOP-88**

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
150	460	1190	ODP	447T	60 Hz	B	6	G	F	< 80
	0Hz	6Hz	15Hz	30Hz	45Hz	60 Hz	75Hz	90Hz	105Hz	120Hz
Amps	173	173	173	173	173	173	173	173	173	173
RPM	0	119	297,5	595	892,5	1190	1487,5	1785	2082,5	2380
Torq ft.lb	529,61	529,61	662,02	662,02	662,02	662,02	529,61	441,34	378,30	331,01
Peak Tq ft.lb	744,77	1489,54	1489,54	1489,54	1489,54	1489,54	1191,63	993,03	851,16	744,77
HP	0	12,0	37,5	75,0	112,5	150,0	150,0	150,0	150,0	150,0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	504	960	1190	1200	Continuous	1,15	40°C	3,300 ft	86
Current (Amps)	1085,0	922,3	645,6	173,0	65,7	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	993,0	744,8	1655,0	662,0	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

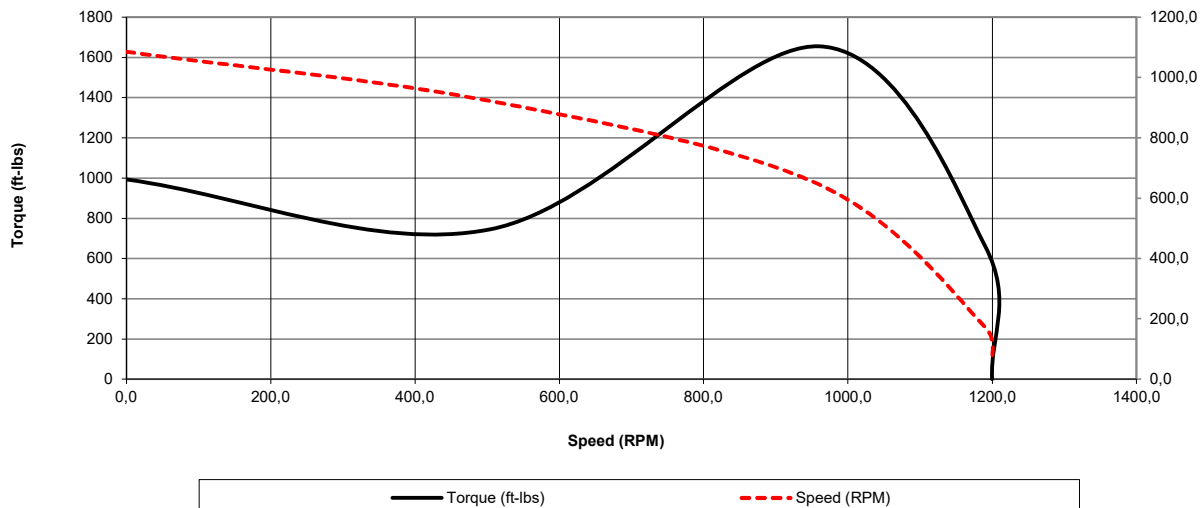

Motor Torque Capability vs RPM

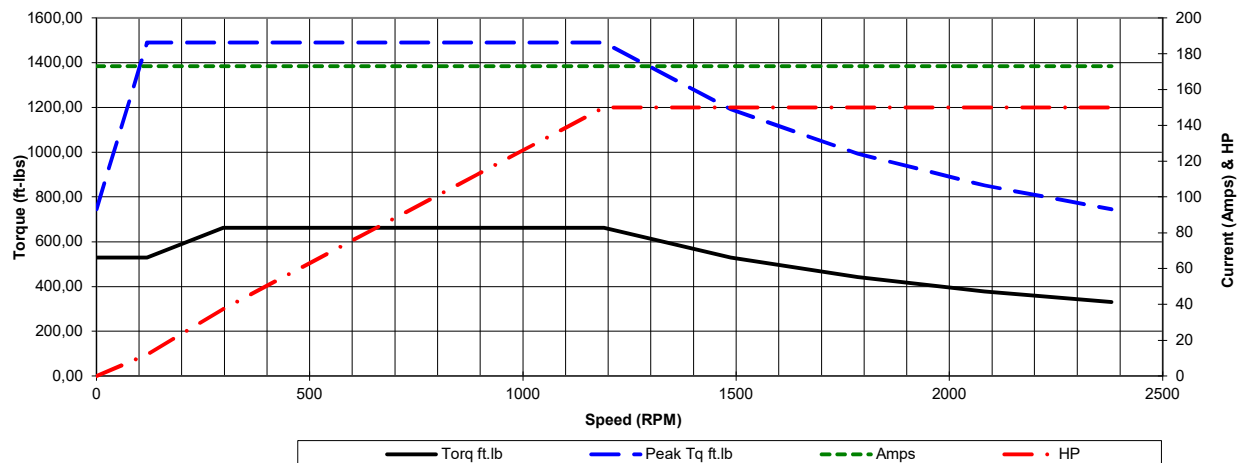


Date: 2023-12-13
 Customer:
 Contact:
 Submittee: J.C. Lavallée

Catalogue #: MQOP-88

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
150	460	1190	ODP	447T	60 Hz	B	6	G	F	< 80
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	65,74	60,55	102,42	135,11	173,00	217,78	267,67			
Torq ft/lbs	0	164,47	329,62	495,47	662,02	829,26	997,22			
RPM	0	1197,5	1195	1192,5	1190	1187,5	1185			
Eff	0	93,53	94,50	95,00	95,40	93,90	93,53			
PF	0	62	74	82	85	85,85	84,15			
Speed (RPM)	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	504	960	1190	1200	Continuous	1,15	40°C	3,300 ft	86
Current (Amps)	1085	922,3	645,6	173	65,74	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	993,03	744,77	1655,04	662,02	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

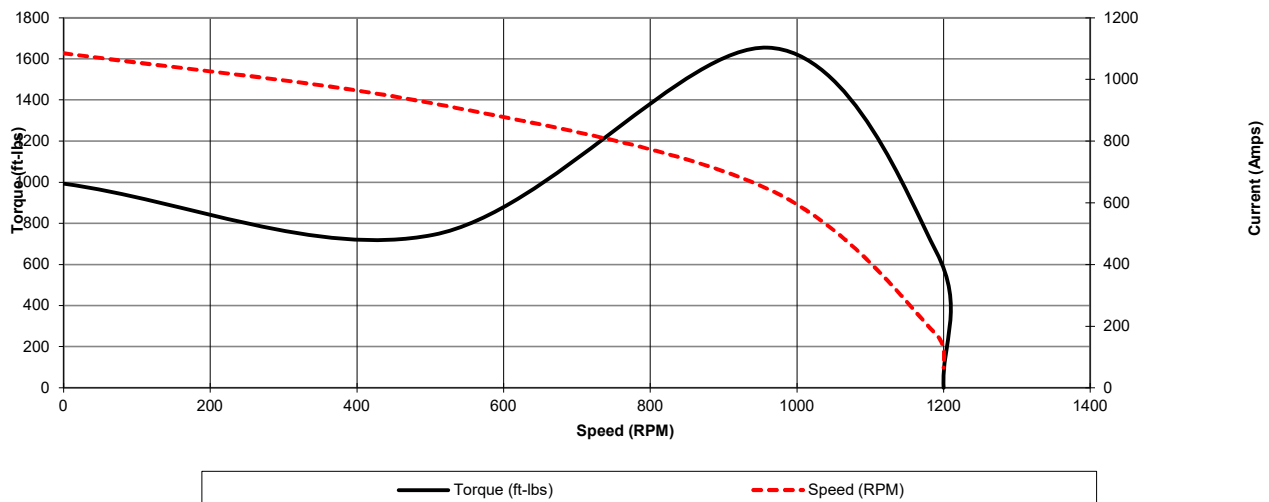

Motor Load Data

