



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: MQP-89

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
150	111,90	460	1,15	94,1%	0,8	449T	B	1085

60 Hz							Code	F.L. RPM
208	230	416	460	480	575	600		
/	/	/	186,00	/	/		G	890

50 Hz								
FLA			S.F. @ 50Hz		Efficiency	Power Factor	Code	F.L. RPM
190	380	415						
/	227		1,00		92,4%	0,810	F	735


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
1800	3	Cont.	F	40°C	1000M (3,300 Ft)	< 80

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	94,1%	Full Load:	0,80	Full Load Ft/Lbs	885,2		
3/4 Load:	94,1%	3/4 Load:	0,77	Locked Rotor %	200		
1/2 Load:	93,5%	1/2 Load:	0,65	Break Down %	225	0	20

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
142,38	2900	1045	Cast Iron	Cast Iron	Cast Iron	TEFC	IP55	3AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
NU319	6318	Mobil PolyrexEm	Rigid	Horizontal	RAL6022	78	84



Inverter Duty, Motor meets MG1 parts 31.4.4.2	VFD SF	Constant Torque Range	Variable Torque Range	Constant HP RPM
	1,00	10:1	20:1	1350

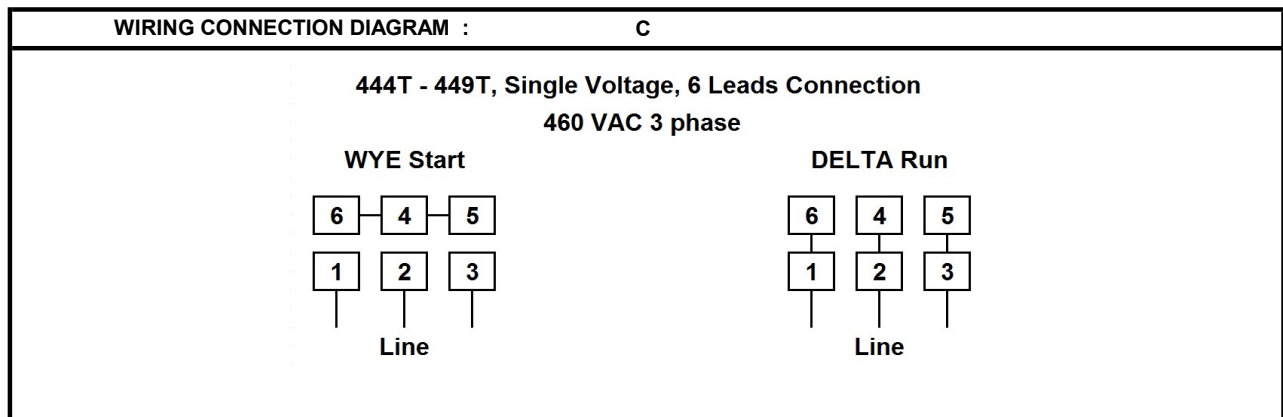

Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MQP-89

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
150	460	890	TEFC	449T	60 Hz	B	8	G	F	< 80
	0Hz	6Hz	15Hz	30Hz	45Hz	60 Hz	75Hz	90Hz	105Hz	120Hz
Amps	186	186	186	186	186	186	186	186	186	186
RPM	0	89	222,5	445	667,5	890	1112,5	1335	1557,5	1780
Torq ft.lb	708,13	708,13	885,17	885,17	885,17	885,17	708,13	590,11	505,81	442,58
Peak Tq ft.lb	940,49	1880,98	1880,98	1880,98	1880,98	1880,98	1504,79	1253,99	1074,85	940,49
HP	0	12,0	37,5	75,0	112,5	150,0	150,0	150,0	150,0	150,0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	378	720	890	900	Continuous	1,15	40°C	3,300 ft	78
Current (Amps)	1085,0	922,3	645,6	186,0	70,7	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	1770,3	1327,8	1991,6	885,2	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

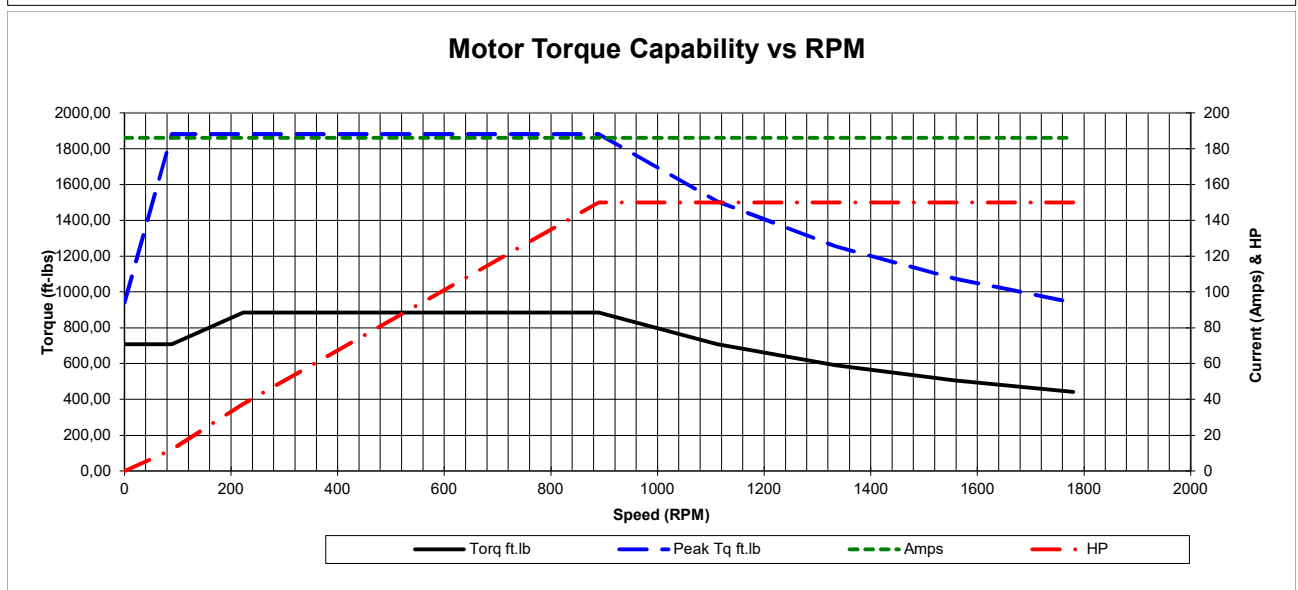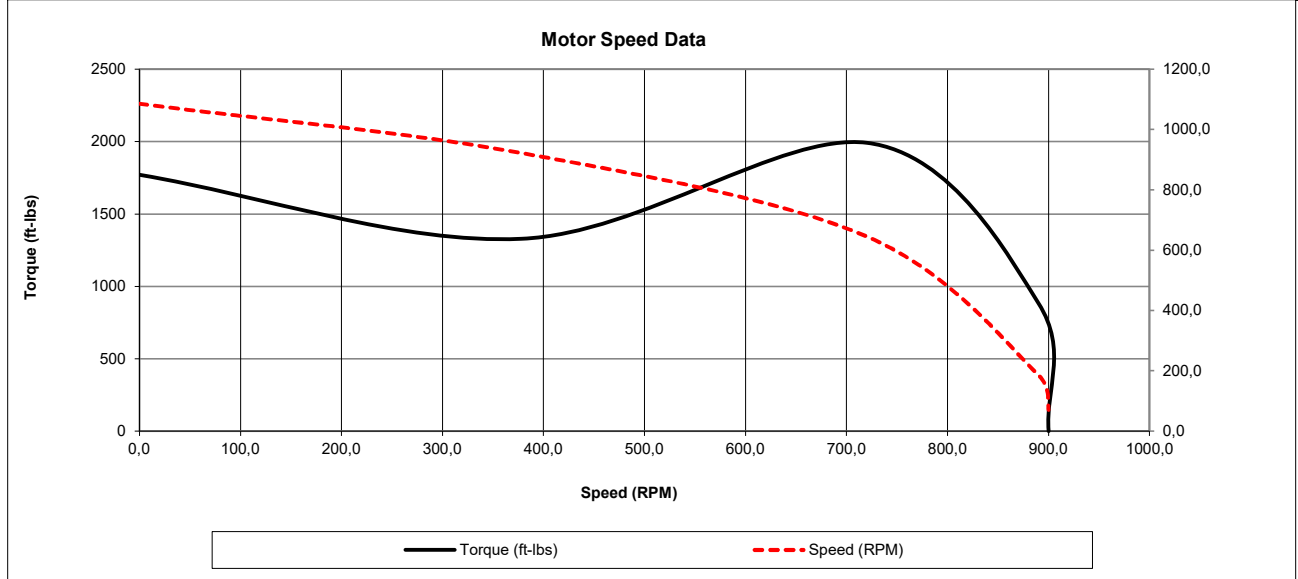


Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MQP-89

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
150	460	890	TEFC	449T	60 Hz	B	8	G	F	< 80
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	70,68	65,10	110,11	145,27	186,00	234,59	288,33			
Torq ft/lbs	0	219,44	440,11	662,02	885,17	1109,58	1335,25			
RPM	0	897,5	895	892,5	890	887,5	885			
Eff	0	92,99	93,50	94,10	94,10	92,62	92,26			
PF	0	58	65	77	80	80,8	79,2			
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0	378	720	890	900	Continuous	1,15	40°C	3,300 ft	78
Current (Amps)	1085	922,3	645,6	186	70,68	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	1770,34	1327,75	1991,63	885,17	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

Motor Speed Data

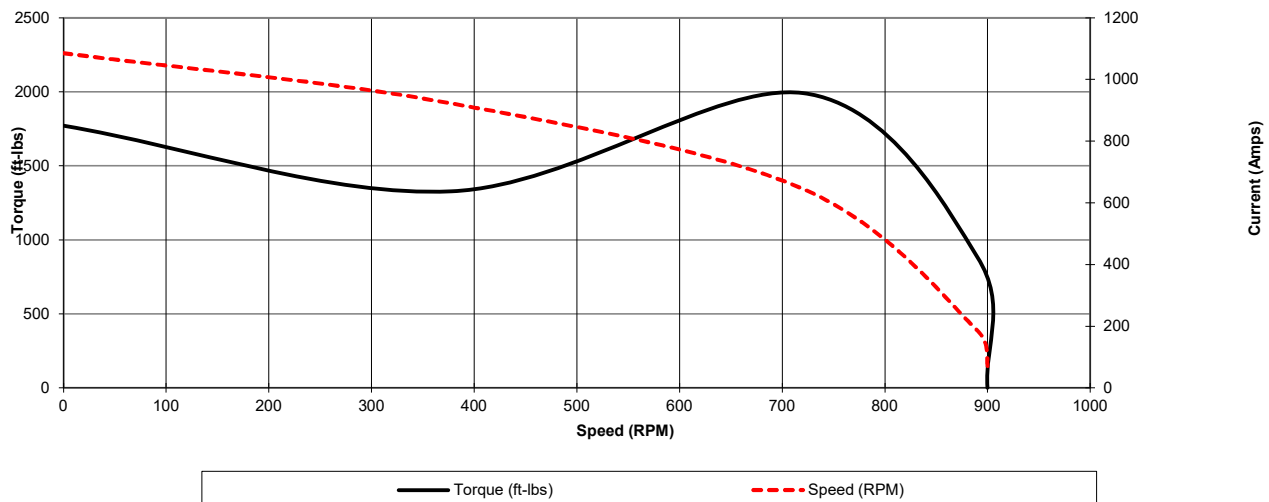

Motor Load Data

