


EPACT NR CAN NEMA 12 - 11										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
1	460	1740	TEFC	143T	60	C	4	M	F	30
Load %	0%	25%	50%	75%	100%	125%	150%			
Amps	1.25	1.33	1.42	1.59	1.75	2.06	2.33			
Torq ft/lbs	0	0.75	1.48	2.24	3.02	3.82	4.65			
RPM	0	1785	1770	1755	1740	1725	1710			
Eff	0	62.86	75.30	79.40	82.50	82.50	82.50			
PF	0	28	43.6	56	69	69	73			
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dB(A) @ 1M
Speed (RPM)	0	756	1440	1740	1800	Continuous	1.15	40°C	3,300 ft	61
Current (Amps)	15	12.8	8.9	1.75	1.25	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	8.75	7.44	9.06	3.02	0.0	C.T.	2:1	V.T.	10:1	

Motor Speed Data



Motor Load Data

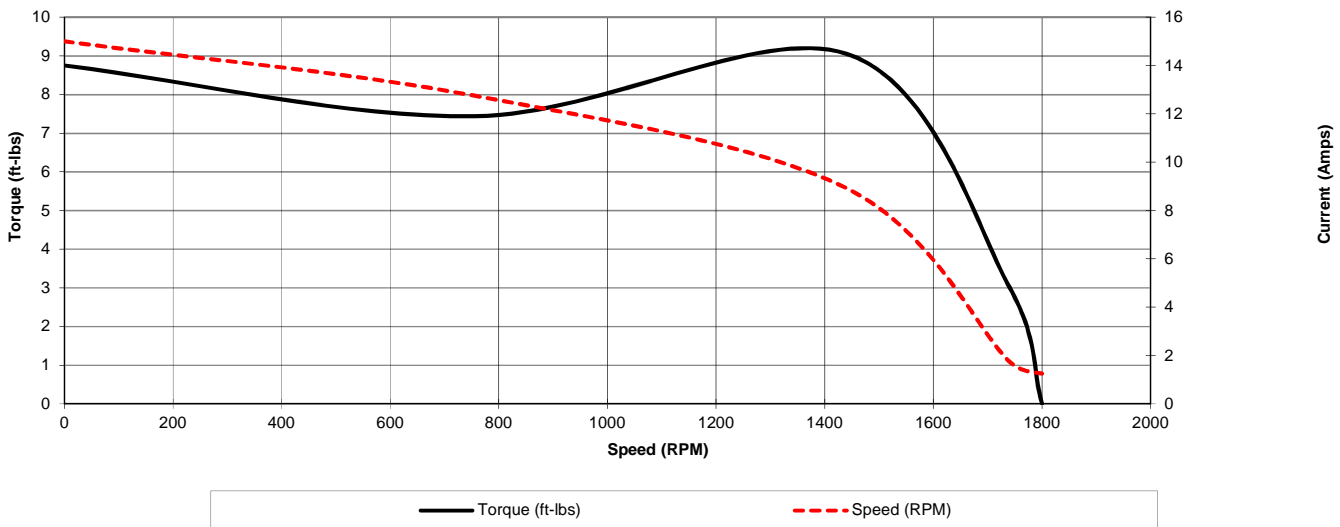