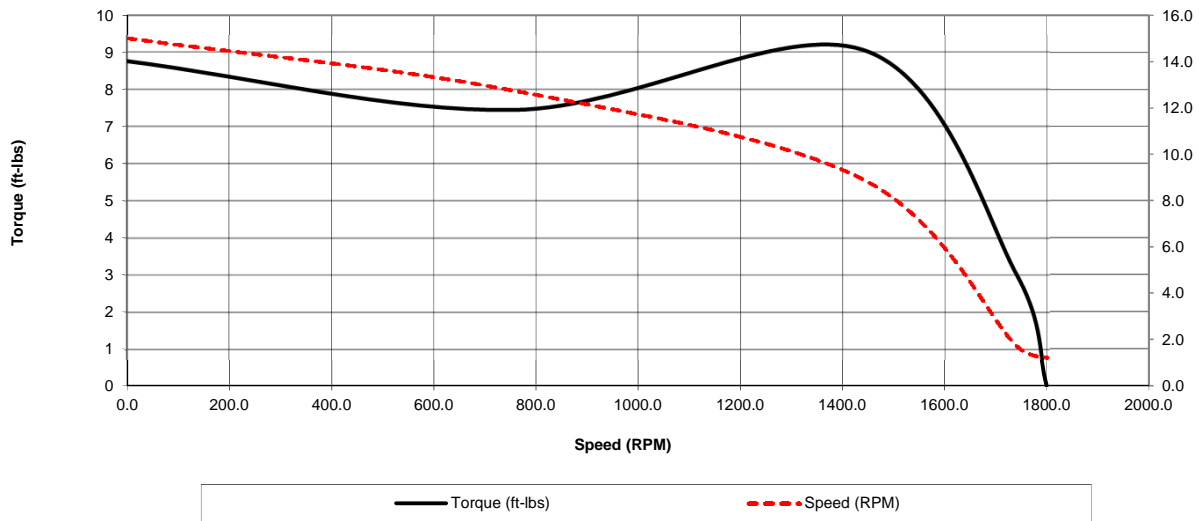


EPACT NR CAN NEMA 12 - 11										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
1	460	1740	TEFC	143T	60	C	4	M	F	30
	0Hz	6Hz	15Hz	30Hz	45Hz	60Hz	75Hz	90Hz	105Hz	120Hz
Amps	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75	1.75
RPM	0	174	435	870	1305	1740	2175	2610	3045	3480
Torq ft.lb	2.41	2.41	3.02	3.02	3.02	3.02	2.41	2.01	1.72	1.51
Peak Tq ft.lb	3.77	7.55	7.55	7.55	7.55	7.55	6.04	5.03	4.31	3.77
HP	0	0.1	0.3	0.5	0.8	1.0	1.0	1.0	1.0	1.0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0.0	756	1440	1740	1800	Continuous	1.15	40°C	3,300 ft	61
Current (Amps)	15.0	12.8	8.9	1.8	1.3	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	8.8	7.4	9.1	3.0	0.0	C.T.	2:1	V.T.	10:1	

**Motor Speed Data**

**Motor Torque Capability vs RPM**
