



PERFORMANCE DATA SHEET

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

Catalogue #: **MTR-104FDJH**

HP	kW	Voltage	Frequency	EFF.	P.F.	Frame	Design	F.L. RPM
1	0,75	115 / 208 - 230	60Hz	79,8%	0,909	56JH	B	1760

FLA			Service Factor	N.L. Amps @ 115V	N.L. Amps @ 230V	KVA Code	L.R. Amps @ 15v	L.R. Amps @ 230v
115	208	230						
9,09	5,02	4,54	1,15	3,85	1,927	K	64	32

Start Cap.	Run Cap.	Main Winding Ω 115V @ 25°C	Main Winding Ω 230V @ 25°C	Auxillary Winding Ω @ 25°C	Safe Cold Start (Secs)
250 μ f/300vac	50 μ f/450vac	0,5000	1,990	2,250	12

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
38	1	Cont.	F	40°C	1000M (3,300 Ft)	63

% Efficiency		Power Factor		Torque		Protection Automatic Thermal Protector
Full Load:	79,8%	Full Load:	0,91	Full Load Ft/Lbs	3,0	
3/4 Load:	71,5%	3/4 Load:	0,88	Locked Rotor %	302	
1/2 Load:	52,9%	1/2 Load:	0,86	Break Down %	312	


Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
/	/	304SS	Rolled Steel	Aluminium Alloy		TEFC	IP55	/

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6205	6203						

WIRING CONNECTION DIAGRAM : B

56C, Dual Voltage, 7 Leads Connection Diagram
Single phase 115 / 208 - 230 VAC

Low Nameplate Voltage High Nameplate Voltage

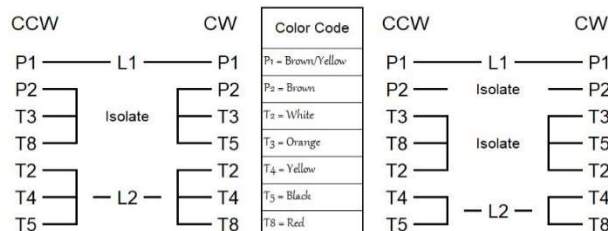

* Reverse rotation by inverting T5 & T8 connection leads.



Date: 2023-12-22
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: **MTR-104FDJH**

Meets or exceeds MEPS (Minimum Efficiency Performance Standards), as described by the US Department of Energy in docket 10CFR431 and Natural Resources Canada's Amendment 14

HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
1	230	1760	TEFC	56JH	60	B	4	K	F	63

	0%	25%	50%	75%	100%	125%	150%
Load %	0%	25%	50%	75%	100%	125%	150%
Amps	3,22	3,45	3,68	4,00	4,54	5,68	6,81
Torq ft/lbs	0	0,73	1,48	2,23	2,98	3,75	4,53
RPM	0	1790	1780	1770	1760	1750	1740
Eff	0	29,38	51,11	69,06	79,80	80,20	82,73
PF	0,00	80,00	86,17	88,17	90,90	89,08	86,36

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dB(A) @ 1M
Speed (RPM)	0	900	1440	1760	1800	Continuous	1,15	40°C	3,300 ft	68
Current (Amps)	32	27,2	19,0	4,54	3,2234	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	9,01	7,66	9,31	2,98	0,0	C.T.	1,99	V.T.	2,25	

