



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: MQOP-106

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
300	223,80	460	1,15	95,4%	0,91	447TS	B	2200

60 Hz								Code	F.L. RPM
208	230	416	460	480	575	600			
/	/	/	322,00	/	/			G	3580

50 Hz									
FLA			S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM		
190	380	415							
/	395		1,00	94,3%	0,910	E	2980		


Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
2002	3	Cont.	F	40°C	1000M (3,300 Ft)	< 80

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	95,4%	Full Load:	0,91	Full Load Ft/Lbs	440,1		
3/4 Load:	95,5%	3/4 Load:	0,91	Locked Rotor %	130		
1/2 Load:	95,1%	1/2 Load:	0,89	Break Down %	245	0	20

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
35,60	310	1045	Cast Iron	Cast Iron	Cast Iron	ODP	IP23	1AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6314	6314	Mobil PolyrexEm	Rigid	Horizontal	RAL6022	98	110



Inverter Duty, Motor meets MG1 parts 31.4.4.2	VFD SF	Constant Torque Range	Variable Torque Range	Constant HP RPM
	1,00	10:1	20:1	5400

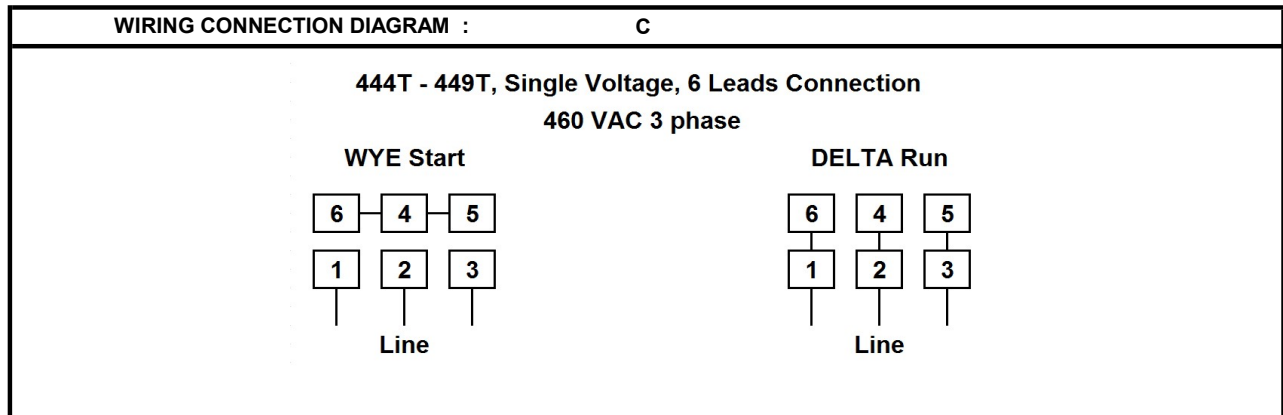

Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: **MQOP-106**

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
300	460	3580	ODP	447TS	60 Hz	B	2	G	F	< 80
	0Hz	6Hz	15Hz	30Hz	45Hz	60 Hz	75Hz	90Hz	105Hz	120Hz
Amps	322	322	322	322	322	322	322	322	322	322
RPM	0	358	895	1790	2685	3580	4475	5370	6265	7160
Torq ft.lb	352,09	352,09	440,11	440,11	440,11	440,11	352,09	293,41	251,49	220,06
Peak Tq ft.lb	489,62	979,25	979,25	979,25	979,25	979,25	783,40	652,83	559,57	489,62
HP	0	24,0	75,0	150,0	225,0	300,0	300,0	300,0	300,0	300,0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBa @ 1M
Speed (RPM)	0,0	1512	2880	3580	3600	Continuous	1,15	40°C	3,300 ft	98
Current (Amps)	2200,0	1870,0	1309,0	322,0	122,4	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	572,1	429,1	1078,3	440,1	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

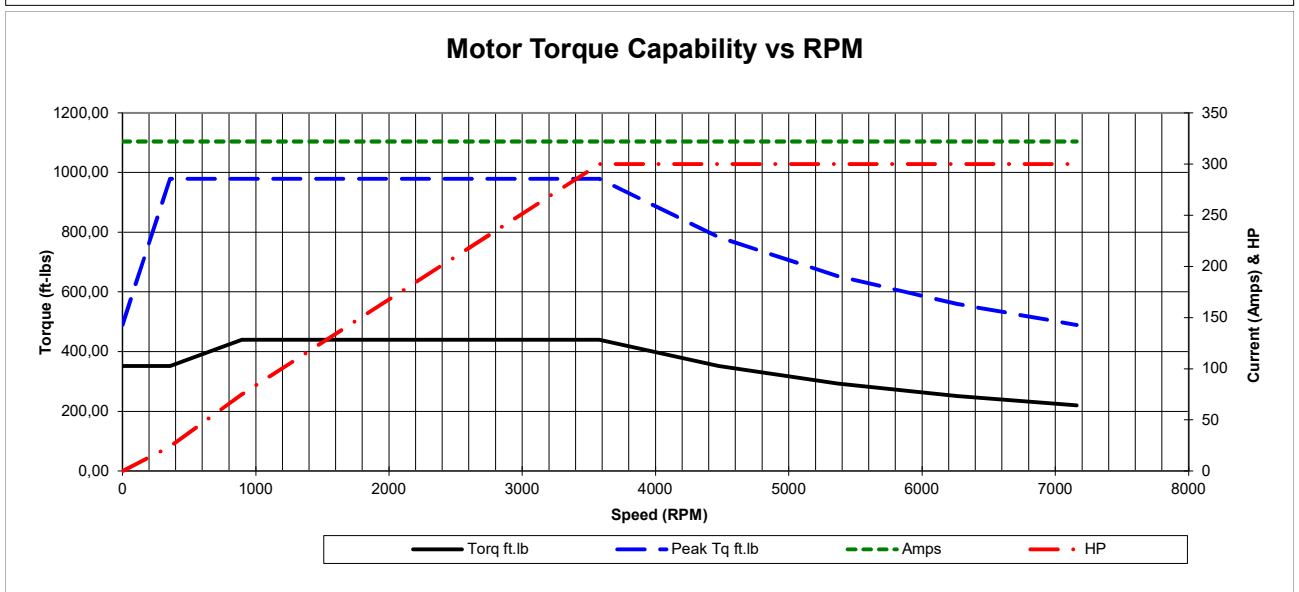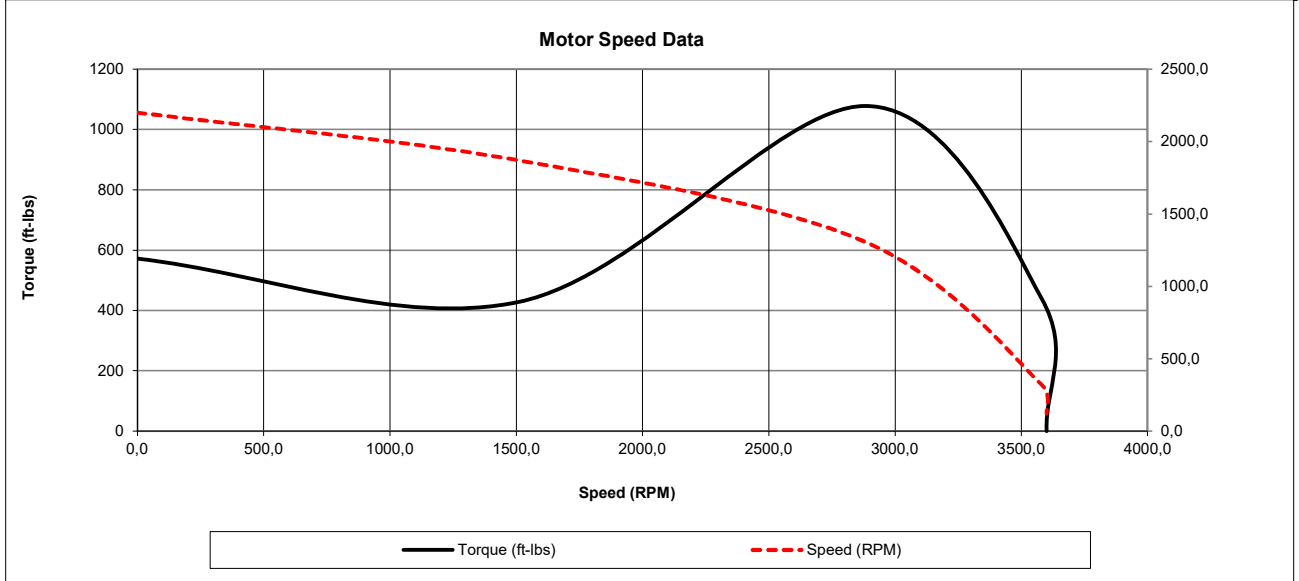



Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: **MQOP-106**

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
300	460	3580	ODP	447TS	60 Hz	B	2	G	F	< 80

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	122,36	106,26	190,62	251,48	322,00	406,85	500,04
Torq ft/lbs	0	109,57	219,44	329,62	440,11	550,91	662,02
RPM	0	3595	3590	3585	3580	3575	3570
Eff	0	93,88	95,10	95,50	95,40	93,90	93,53
PF	0	70,4	89	91	91	91,91	90,09

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBa @ 1M
Speed (RPM)	0	1512	2880	3580	3600	Continuous	1,15	40°C	3,300 ft	98
Current (Amps)	2200	1870,0	1309,0	322	122,36	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	572,15	429,11	1078,27	440,11	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

