



**PERFORMANCE DATA SHEET
NEMA PREMIUM NR CAN NEMA 12 - 12**

Catalogue #: MQP-36S

HP	kW	Voltage	S.F. @ 60Hz	EFF.	P.F.	Frame	Design	L.R. Amps
15	11,19	230/460	1,25	91,0%	0,91	215T	B	116

60 Hz								Code	F.L. RPM
208	230	416	460	480	575	600			
/	34	/	17,00	/	/			G	3510

50 Hz								
FLA			S.F. @ 50Hz	Efficiency	Power Factor	Code	F.L. RPM	
190	380	415						
42,0	21		1,00	89,5%	0,920	E	2880	

Wgt. Lbs	PH	Duty	Insul. Class	Amb.	Elevation	Temp. Rise° C
162	3	Cont.	F	40°C	1000M (3,300 Ft)	59

% Efficiency		% Power Factor		Torque		Winding Resist. Ω	Safe Cold Start (Secs)
Full Load:	91,0%	Full Load:	0,91	Full Load Ft/Lbs	22,4		
3/4 Load:	91,0%	3/4 Load:	0,89	Locked Rotor %	170		
1/2 Load:	90,5%	1/2 Load:	0,83	Break Down %	280	0,56	20

Rotor Inertia Wk2 Lb-Ft2	Max Load Inertia Wk2 Lb-Ft2	Shaft Material	Frame Material	DE Bracket Type	ODE Bracket Type	Enclosure	NEMA Rating	Lead Wire Size
0,71	75	1045	Cast Iron	Cast Iron	Cast Iron	TEFC	IP55	12AWG

Ball Bearings		Grease	Mount Type	Orientation	Paint	Sound Pressure @ 3FT	Sound Power
DE	ODE						
6308	6308	Sealed Bearings	Rigid	Horizontal	RAL6022	84	94



Inverter Duty, Motor meets MG1 parts 31.4.4.2	VFD SF	Constant Torque Range	Variable Torque Range	Constant HP RPM
	1,00	10:1	20:1	5400



Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MQP-365

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
15	460	3510	TEFC	215T	60 Hz	B	2	G	F	59
	0Hz	6Hz	15Hz	30Hz	45Hz	60 Hz	75Hz	90Hz	105Hz	120Hz
Amps	17	17	17	17	17	17	17	17	17	17
RPM	0	351	877,5	1755	2632,5	3510	4387,5	5265	6142,5	7020
Torq ft.lb	17,96	17,96	22,44	22,44	22,44	22,44	17,96	14,96	12,83	11,22
Peak Tq ft.lb	26,93	53,87	53,87	53,87	53,87	53,87	43,09	35,91	30,78	26,93
HP	0	1,2	3,8	7,5	11,3	15,0	15,0	15,0	15,0	15,0
	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBA @ 1M
Speed (RPM)	0,0	1512	2880	3510	3600	Continuous	1,25	40°C	3,300 ft	84
Current (Amps)	116,0	98,6	69,0	17,0	6,5	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft.-lbs)	38,2	28,6	62,8	22,4	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

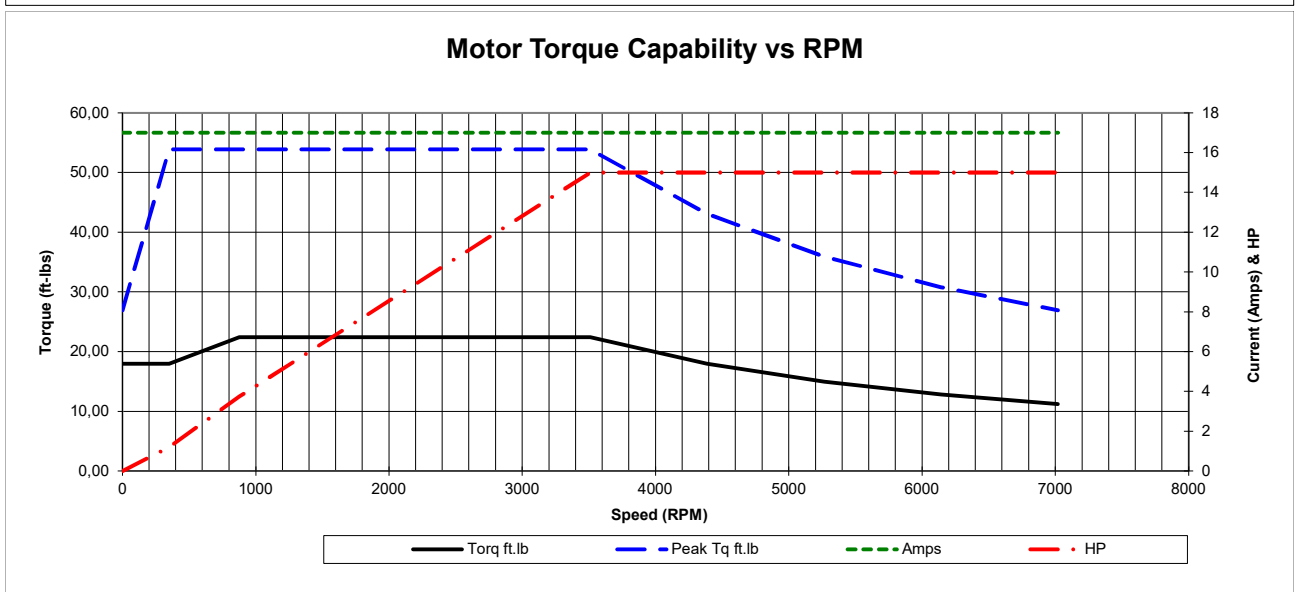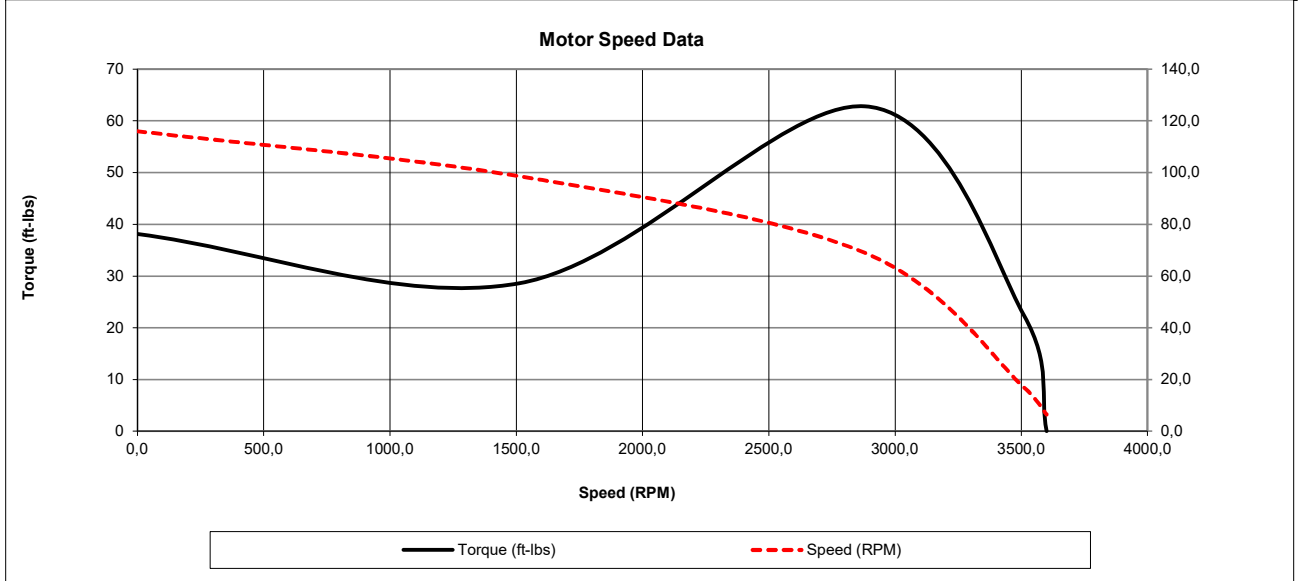



Date: 2023-12-13
 Customer: _____
 Contact: _____
 Submittee: J.C. Lavallée

Catalogue #: MQP-36S

NEMA PREMIUM NR CAN NEMA 12 - 12										
HP	VAC	RPM	Enclosure	Frame	Frequency	Design	Poles	LR Code Letter	Insulation Class	Temp. Rise °C
15	460	3510	TEFC	215T	60 Hz	B	2	G	F	59

Load %	0%	25%	50%	75%	100%	125%	150%
Amps	6,46	7,26	10,06	13,28	17,00	21,26	25,67
Torq ft/lbs	0	5,51	11,08	16,73	22,44	28,24	34,10
RPM	0	3577,5	3555	3532,5	3510	3487,5	3465
Eff	0	78,02	90,50	91,00	91,00	89,57	89,22
PF	0	62	83	89	91	92,183	92,001

	Locked Rotor	Pull-Up	Breakdown	Rated Load	Idle	Duty	S. F.	Ambient	Elevation	dBa @ 1M
Speed (RPM)	0	1512	2880	3510	3600	Continuous	1,25	40°C	3,300 ft	84
Current (Amps)	116	98,6	69,0	17	6,46	VFD Rating: Meets MG1 parts 31.4.4.2				
Torque (ft-lbs)	38,16	28,62	62,84	22,44	0,0	C.T.	10:1	V.T.	20:1	VFD SF 1.00

